

Customized FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE  <b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>		ATTORNEY DOCKET NO P07477US00/MP  U.S. APPLICATION NO <b>10/019746</b>
INTERNATIONAL APPLICATION NO. PCT/AU00/00839	INTERNATIONAL FILING DATE 11 JULY 2000	PRIORITY DATE CLAIMED 15 JULY 1999
TITLE OF INVENTION: METHOD OF WRITING GRATING STRUCTURES		
APPLICANT(S) FOR DO/EO/US: CANNING, John		
Applicant herewith submits to the US Designated/Elected Office (DO/EO/US) the following items and other information		
<div style="margin-left: 20px;"> <input checked="" type="checkbox"/> 1. This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.  <input type="checkbox"/> 2. This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 USC 371.  <input checked="" type="checkbox"/> 3. This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Art. 22 and 39(1).  <input checked="" type="checkbox"/> 4. A proper Demand for International Preliminary Examination was made by the 19<sup>th</sup> month from the earliest claimed priority date.  <input checked="" type="checkbox"/> 5. A <b>copy</b> of the International Application as filed (35 U.S.C. 371 (c)(2))  <div style="margin-left: 20px;"> <input type="checkbox"/> a. is transmitted herewith (required only if not transmitted by the International Bureau)  <input checked="" type="checkbox"/> b. has been transmitted by the International Bureau.  <input type="checkbox"/> c. is not required, as the application was filed in the United States Receiving Office (RO/US)           </div> <input type="checkbox"/> 6. A <b>translation</b> of the International Application into English (35 U.S.C. 371(c)(2)).  <input checked="" type="checkbox"/> 7. Amendments to the claims of the International Appln. under PCT Article 19 (35 USC 371 (c)(3))  <div style="margin-left: 20px;"> <input type="checkbox"/> a. are transmitted herewith (required only if not transmitted by the International Bureau).  <input type="checkbox"/> b. have been transmitted by the International Bureau.  <input checked="" type="checkbox"/> c. have not been made; however, the time limit for making such amendments had NOT expired  <input checked="" type="checkbox"/> d. have not been made and will not be made.           </div> <input type="checkbox"/> 8. A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))  <input type="checkbox"/> 9. An <b>oath</b> or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).  <input type="checkbox"/> 10. A translation of the annexes to the Int'l Prelim. Exam. Report under PCT Article 36 (35 U.S.C. 371(c)(5)).  <b>Items 11. to 20. below concern document(s) or information included:</b>  <input type="checkbox"/> 11. An <b>Information Disclosure Statement</b> under 37 C.F.R. 1.97 and 1.98.  <input type="checkbox"/> 12. An <b>Assignment</b> document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.  <input checked="" type="checkbox"/> 13. A <b>First preliminary amendment</b>.  <input type="checkbox"/> 14. A <b>Second or Subsequent preliminary amendment</b>.  <input type="checkbox"/> 15. A <b>substitute specification</b>.  <input type="checkbox"/> 16. A <b>change of power of attorney and/or address letter</b>.  <input type="checkbox"/> 17. A <b>computer-readable form of the sequence listing</b> in accordance with PCT Rule 13ter.2 &amp; 35 USC 1.821-825  <input type="checkbox"/> 18. A <b>second copy of the published international application</b> under 35 USC 154(d)(4).  <input type="checkbox"/> 19. A <b>second copy of the English translation of the international application</b> under 35 USC 154(d)(4).  <input type="checkbox"/> 20. <b>Other items or information:</b>  <div style="margin-left: 20px;"> <input type="checkbox"/>  <input type="checkbox"/> </div> <input type="checkbox"/> A copy of the Notification of Missing Requirements under 35 U.S.C. 371.  <input type="checkbox"/> In the event that a petition for extension of time is required to be submitted herewith, and in the event that a separate petition does not accompany this response, applicant hereby petitions under 37 CFR 1.136(a) for an extension of time of as many months as are required to render this submission timely. Any fee is authorized in 17(c).         </div>		
Date: 15 January 2002		

100114746 11619012

JG13 Rec'd PCT/PTO 15 JAN 2002

U.S. APPLICATION NO. <i>(If known)</i>		INTERNATIONAL APPLICATION NO.		ATTORNEY DOCKET NO	
10/019746		PCT/AU00/00839		P07477US00/DEJ	
<input checked="" type="checkbox"/> 21. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
<input checked="" type="checkbox"/> Basic National Fee (37 CFR 1.492 (a) (1)-(5):					
<input checked="" type="checkbox"/> Neither Int'l Prelim. Exam. fee nor Int'l Search fee paid to USPTO \$1040					
<input type="checkbox"/> Search Report has been prepared by the EPO or JPO \$ 890					
<input type="checkbox"/> No Int'l Prelim. Ex. fee paid to USPTO but Int'l Search fee paid to USPTO \$ 740					
<input type="checkbox"/> International preliminary examination fee paid to USPTPO \$ 710					
<input type="checkbox"/> Int'l Prelim. Ex. fee paid to USPTO & all claims satisfied PCT Art. 33(1)-(4) \$ 100					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 1040	
<input type="checkbox"/> Surcharge of \$130 for furnishing the oath or declaration later than from the earliest claimed priority date (37 CFR 1.492(e)). <input type="checkbox"/> 20 mos. <input type="checkbox"/> 30 mos. +				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	40 - 20 =	20	X \$18 =	\$ 360	
Independent Claims	03 - 03 =		X \$84 =	\$	
<input type="checkbox"/> Multiple Dependent Claim(s) (if applicable)			+ \$280 =	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 1400	
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ 700	
SUBTOTAL =				\$ 700	
<input type="checkbox"/> Processing fee of \$130 for furnishing the English translation later than from the earliest claimed priority date (37 CFR 1.492(f)). <input type="checkbox"/> 20 mos. <input type="checkbox"/> 30 mos. +				\$	
TOTAL NATIONAL FEE =				\$ 700	
<input type="checkbox"/> Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property +				\$	
TOTAL FEES ENCLOSED =				\$ 700	
Amount to be				Refunded	\$
				Charged	\$
<input checked="" type="checkbox"/> a. A check in the amount of \$700 to cover the above fees is enclosed.					
<input type="checkbox"/> b. Please charge my Deposit Account No. 12-0555 in the amount of \$ to cover the above fees.					
<input checked="" type="checkbox"/> c. The Commissioner is hereby authorized to charge any additional fees required or credit overpayment to Deposit Account No. 12-0555.					
<b>Note:</b> Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:			SIGNATURE: <u>Douglas E. Jackson</u>		
MARVIN PETRY			NAME: Douglas E. Jackson		
At the address (below) of CUSTOMER NO. 00881.			REG. NO.: 28518		
LARSON & TAYLOR, PLC			PHONE NO.: 703-739-4900		
1199 NORTH FAIRFAX ST.			Date: 15 January 2002		
SUITE 900					
ALEXANDRIA, VA 22314					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent

In re patent application of: CANNING

Serial No.: Unassigned

Examiner: Unassigned

Filed: On even date herewith

Art Unit: Unassigned

For: METHOD OF WRITING GRATING STRUCTURES

Dckt No.: P07477US00/MP

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents

Washington, D.C. 20231

SIR:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS


A clean version of all pending claims is provided herewith in **Attachment A**. It will be noted that all the have been amended relative to the previously provided version as shown by the marked up version thereof in **Attachment B** provided herewith.

REMARKS

The present amendment is made to eliminate multiple dependent claims and thus eliminate the requirement for a multiple claim fee.

Respectfully submitted,

Date: 1/15/02

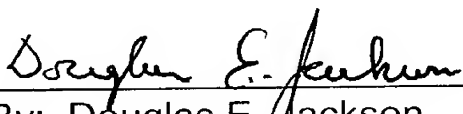  
By: Douglas E. Jackson  
Registration No.: 28,518

## ATTACHMENT A

### Clean Replacement/New Claims (entire set of pending claims)

*Following herewith is a clean copy of the entire set of pending claims.*

1. A method of forming a grating structure in a photosensitive waveguide, the method comprising the steps of:
  - dividing an input coherent beam into at least three coherent beams;
  - transmitting the three coherent beams through respective optical pathes in a manner such that they interfere at a first predetermined position;
  - modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and
  - placing a photosensitive waveguide at the predetermined position so as to form the grating structure comprising different order gratings super-imposed at the predetermined position through refractive index changes induced in the photosensitive waveguide.
2. A method as claimed in claim 1, wherein the step of dividing the input beam comprises diffraction of the input beam.
3. (amended) A method as claimed in claim 2, wherein the dividing of the input coherent beam into three coherent beams utilizes a phasemask.
4. (amended) A method as claimed in claim 2, wherein the three coherent beams are made up from two first order diffracted beams and one zero order diffracted beam.
5. (amended) A method as claimed in claim 1, wherein the dividing of the input coherent beam utilizes at least two mirrors of less than 100% reflection.

6. (amended) A method as claimed in claim 1, wherein the transmission along the optical path utilizes at least two refractive elements for reflecting two of the beams so as to direct them to the predetermined position.

7. (amended) A method as claimed in claim 1, wherein the method further comprises the step of tuning a period of the resulting grating structure.

8. (amended) A method as claimed in claim 7, wherein the tuning of the period is effected through tilting of the or reflective elements utilized in the transmitting of the three coherent beams.

9. (amended) A method as claimed in claim 1, wherein the method comprises the step of tuning a shape of the resultant refractive index profile in the photosensitive waveguide.

10. A method as claimed in claim 9, wherein the tuning of the shape is effected by adjusting the relative intensities of the interfering three coherent beams.

11. (amended) A method as claimed in claim 1, wherein the method comprises the step of switching between the writing of different order gratings.

12. A method as claimed in claim 11, wherein the switching is effected by selectively blocking out at least one of the three coherent beams.

13. A method of writing a grating structure in a photosensitive waveguide, the method comprising the steps of:

- dividing an input coherent beam into two nth order beams and a zero order beam utilizing a phase mask, wherein nth is equal to or greater than first;
- placing a photosensitive waveguide substantially adjacent a surface of the phase mask where the nth order beams and the zero order beam overlap;

- modulating/adjusting the intensity of the zero order beam transmitted by the phase mask such that a grating structure comprising different order gratings superimposed is created through refractive index changes induced in the photosensitive waveguide.

14. A method as claimed in claim 13, wherein the formed grating structure comprises a grating having a non-sinusoidal profile along a light propagation direction of the wave guide.

15. (amended) A method as claimed in claim 13, wherein the grating comprises a first order grating.

16. (amended) A method as claimed in claim 13, wherein the grating structure comprises a higher order grating.

17. (amended) A method as claimed in claim 13, wherein the grating structure comprises different order gratings superimposed.

18. A method as claimed in claim 17, wherein the grating structure comprises a first and second order gratings superimposed.

19. An apparatus for writing a grating structure in a photosensitive waveguide, the apparatus comprising:

- means for dividing an input coherent light beam into at least three cohere
- means for modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and
- an optical circuit for transmitting each of the three coherent beams to a predetermined position so as to form an interference pattern at the first predetermined position for, in use, writing the grating structure comprising different order gratings super-imposed through refractive index changes induced in the photosensitive waveguide.

20. An apparatus as claimed in claim 19, wherein the apparatus comprises at least one modulation means for modulating/adjusting the phase and/or intensity of one of the beams relative to the others.

21. (amended) An apparatus as claimed in claim 19, wherein the means for dividing the input beam comprises diffraction means.

22. (amended) An apparatus as claimed in claim 19, wherein the three beams comprise the zero order diffraction and two first order diffraction beams.

23. (amended) An optical filter comprising a grating structure written in accordance with claim 1.

24. A filter as claimed in claim 23, wherein second order modulation in the grating structure results, in use, in the emission of filtered light energy substantially perpendicular to a core axis of the waveguide.

25. (amended) A filter as claimed in claim 23, wherein the filter comprises a chirped second order grating which transmits predetermined wavelengths of light energy substantially perpendicular to a core axis of the waveguide and at predetermined positions along the waveguide.

26. (amended) A filter as claimed in claim 23, wherein the grating structure comprises a grating comprising a first order grating and the second order grating superimposed.

27. (amended) An optical free space coupler comprising a first grating structure written in accordance with the method as claimed in claim 1.

28. A coupler as claimed in claim 27, wherein the first grating structure is formed within a first optical waveguide and is arranged to provide the emission of filtered light

energy substantially perpendicular to a core axis of the first waveguide; and a second grating structure formed within a second optical waveguide placed in the path of emission of the filtered light energy can couple a portion of the filtered light energy along the second optical waveguide, and wherein at least one of the first or second grating structures comprises a second order grating.

29. A coupler as claimed in claim 28, wherein at least one of the first or second grating structures comprises a first order grating and a second order grating superimposed.

30. (amended) An optical sensor comprising a grating structure written in accordance with the method as claimed in claim 1.

31. A sensor as claimed in claim 30, wherein the grating structure comprises a second order grating formed within an optical waveguide, the grating structure having a predetermined second order modulation so as to provide for the reciprocal emission of optical energy substantially perpendicular to the optical waveguide; the sensor further comprising an optically sensitive material spaced adjacent to the optical waveguide, the material having optical reflective properties variable in accordance with an external physical parameter, the material reflecting the emitted optical energy from the grating structure back to the grating structure.

32. (amended) A sensor as claimed in claim 30, wherein the grating structure comprises a first order grating and the second order grating.

33. (amended) A grating structure written in accordance with the method as claimed in claim 1 into an optical fiber.

34. (amended) A device for suppressing ripples in a dispersion compensator in an optical fiber, the device comprising a grating structure written in accordance with a



method as claimed in claim 1 for providing an optical loss mechanism to effect the suppressing of the ripples.

35. A device as claimed in claim 34, wherein the grating structure comprises a second order grating.

36. (amended) A device as claimed in claim 33, wherein the grating structure comprises a first order grating and a second order grating superimposed.

37. (amended) A dispersion compensator for compensating dispersion in an optical fiber, the compensator comprising a grating structure written in accordance with a method as claimed in claim 1 for providing an optical loss mechanism for suppressing ripples.

38. (amended) A compensator is claimed in claim 37, wherein the grating structure comprises a higher order grating.

39. (amended) A compensator as claimed in claims 37, wherein the grating structure comprises a second order grating.

40. (amended) A compensator as claimed in claim 37, wherein the grating structure comprises a first order grating and a second order grating superimposed.

## ATTACHMENT B

### Marked Up Replacement Claims

*Following herewith is a marked up copy of each rewritten claim together with all other pending claims.*

1. A method of forming a grating structure in a photosensitive waveguide, the method comprising the steps of:
  - dividing an input coherent beam into at least three coherent beams;
  - transmitting the three coherent beams through respective optical pathes in a manner such that they interfere at a first predetermined position;
  - modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and
  - placing a photosensitive waveguide at the predetermined position so as to form the grating structure comprising different order gratings super-imposed at the predetermined position through refractive index changes induced in the photosensitive waveguide.
2. A method as claimed in claim 1, wherein the step of dividing the input beam comprises diffraction of the input beam.
3. (amended) A method as claimed in claim 2, wherein the dividing of the input coherent beam into three coherent beams ~~utilises~~utilizes a phasemask.
4. (amended) A method as claimed in claims 2-~~or~~3, wherein the three coherent beams are made up from two first order diffracted beams and one zero order diffracted beam.
5. (amended) A method as claimed in claim 1, wherein the dividing of the input coherent beam ~~utilises~~utilizes at least two mirrors of less than 100% reflection.

6. (amended) A method as claimed in claims 1 ~~or~~ 5, wherein the transmission along the optical pathes ~~utilises~~utilizes at least two refractive elements for reflecting two of the beams so as to direct them to the predetermined position.

7. (amended) A method as claimed in ~~any one of the preceding claims~~ claim 1, wherein the method further comprises the step of tuning a period of the resulting grating structure.

8. (amended) A method as claimed in claim 7, wherein the tuning of the period is effected through tilting of the ~~or reflective elements~~ utilisedutilized in the transmitting of the three coherent beams.

9. (amended) A method as claimed in ~~any one of the preceding claims~~ claim 1, wherein the method comprises the step of tuning a shape of the resultant refractive index profile in the photosensitive waveguide.

10. A method as claimed in claim 9, wherein the tuning of the shape is effected by adjusting the relative intensities of the interfering three coherent beams.

11. (amended) A method as claimed in ~~any one of the preceding claims~~ claim 1, wherein the method comprises the step of switching between the writing of different order gratings.

12. A method as claimed in claim 11, wherein the switching is effected by selectively blocking out at least one of the three coherent beams.

13. A method of writing a grating structure in a photosensitive waveguide, the method comprising the steps of:

- dividing an input coherent beam into two nth order beams and a zero order beam utilizing a phase mask, wherein nth is equal to or greater than first;

- placing a photosensitive waveguide substantially adjacent a surface of the phase mask where the nth order beams and the zero order beam overlap;
- modulating/adjusting the intensity of the zero order beam transmitted by the phase mask such that a grating structure comprising different order gratings superimposed is created through refractive index changes induced in the photosensitive waveguide.

14. A method as claimed in claim 13, wherein the formed grating structure comprises a grating having a non-sinusoidal profile along a light propagation direction of the wave guide.

15. (amended) A method as claimed in claim 13 ~~or 14~~, wherein the grating comprises a first order grating.

16. (amended) A method as claimed in ~~any one of claims 13 to 15~~ claim 13, wherein the grating structure comprises a higher order grating.

17. (amended) A method as claimed in ~~any one of claims 13 to 16~~ claim 13, wherein the grating structure comprises different order gratings superimposed.

18. A method as claimed in claim 17, wherein the grating structure comprises a first and second order gratings superimposed.

19. An apparatus for writing a grating structure in a photosensitive waveguide, the apparatus comprising:

- means for dividing an input coherent light beam into at least three cohere
- means for modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and
- an optical circuit for transmitting each of the three coherent beams to a predetermined position so as to form an interference pattern at the first predetermined

position for, in use, writing the grating structure comprising different order gratings super-imposed through refractive index changes induced in the photosensitive waveguide.

20. An apparatus as claimed in claim 19, wherein the apparatus comprises at least one modulation means for modulating/adjusting the phase and/or intensity of one of the beams relative to the others.

21. (amended) An apparatus as claimed in claims 19 to 20, wherein the means for dividing the input beam comprises diffraction means.

22. (amended) An apparatus as claimed in ~~any one of claims 19 to 21~~ claim 19, wherein the three beams comprise the zero order diffraction and two first order diffraction beams.

23. (amended) An optical filter comprising a grating structure written in accordance with ~~any one of claims 1 to 18~~ claim 1.

24. A filter as claimed in claim 23, wherein second order modulation in the grating structure results, in use, in the emission of filtered light energy substantially perpendicular to a core axis of the waveguide.

25. (amended) A filter as claimed in claims 23 ~~or 24~~, wherein the filter comprises a chirped second order grating which transmits predetermined wavelengths of light energy substantially perpendicular to a core axis of the waveguide and at predetermined positions along the waveguide.

26. (amended) A filter as claimed in ~~any one of claims 23 to 25~~ claim 23, wherein the grating structure comprises a grating comprising a first order grating and the second order grating superimposed.

27. (amended) An optical free space coupler comprising a first grating structure written in accordance with the method as claimed in ~~any one of claims 1 to 18~~ claim 1.

28. A coupler as claimed in claim 27, wherein the first grating structure is formed within a first optical waveguide and is arranged to provide the emission of filtered light energy substantially perpendicular to a core axis of the first waveguide; and a second grating structure formed within a second optical waveguide placed in the path of emission of the filtered light energy can couple a portion of the filtered light energy along the second optical waveguide, and wherein at least one of the first or second grating structures comprises a second order grating.

29. A coupler as claimed in claim 28, wherein at least one of the first or second grating structures comprises a first order grating and a second order grating superimposed.

30. (amended) An optical sensor comprising a grating structure written in accordance with the method as claimed in ~~any one of claims 1 to 18~~ claim 1.

31. A sensor as claimed in claim 30, wherein the grating structure comprises a second order grating formed within an optical waveguide, the grating structure having a predetermined second order modulation so as to provide for the reciprocal emission of optical energy substantially perpendicular to the optical waveguide; the sensor further comprising an optically sensitive material spaced adjacent to the optical waveguide, the material having optical reflective properties variable in accordance with an external physical parameter, the material reflecting the emitted optical energy from the grating structure back to the grating structure.

32. (amended) A sensor as claimed in claims 30 ~~or 31~~, wherein the grating structure comprises a first order grating and the second order grating.

33. (amended) A grating structure written in accordance with the method as claimed in ~~any one of claims 1 to 18~~ claim 1 into an optical ~~fiber~~fiber.

34. (amended) A device for suppressing ripples in a dispersion compensator in an optical ~~fiber~~fiber, the device comprising a grating structure written in accordance with a method as claimed in ~~any one of claims 1 to 17~~ claim 1 for providing an optical loss mechanism to effect the suppressing of the ripples.

35. A device as claimed in claim 34, wherein the grating structure comprises a second order grating.

36. (amended) A device as claimed in claims 33-~~or~~ 34, wherein the grating structure comprises a first order grating and a second order grating superimposed.

37. (amended) A dispersion compensator for compensating dispersion in an optical ~~fiber~~fiber, the compensator comprising a grating structure written in accordance with a method as claimed in ~~any one of claims 1 to 18~~ claim 1 for providing an optical loss mechanism for suppressing ripples.

38. (amended) A compensator is claimed in claim 37, wherein the grating structure comprises a higher order grating.

39. (amended) A compensator as claimed in claims 37-~~or~~ 38, wherein the grating structure comprises a second order grating.

40. (amended) A compensator a claimed in ~~any one of claims 37 to 39~~ claim 37, wherein the grating structure comprises a first order grating and a second order grating superimposed.

10/019746

ART 34 AMDT

1

METHOD OF WRITING GRATING STRUCTURES

Field of the Invention

The present invention relates broadly to a method of writing a grating structure in a photosensitive optical waveguide. The invention further relates to grating structures when written in accordance with that method and to optical devices incorporating such grating structures.

Background of the Invention

Optical devices have become increasingly important in the telecommunications field in general. In particular the transmission of data by optical fibres is an attractive alternative to conventional data transmission systems.

Accordingly, there is a great interest in development of optical devices which facilitate e.g. data transfer by optical fibres. Many optical device designs incorporate grating structures for various optical processing functions, including for example for filtering or sensing.

To facilitate the design of new optical devices, it is therefore desirable to provide new methods for writing grating structures in photosensitive waveguides.

Summary of Invention

In accordance with a first aspect of the present invention, there is provided a method of forming a grating structure in a photosensitive waveguide, the method comprising the steps of:

- dividing an input coherent beam into at least three coherent beams;
- transmitting the three coherent beams through respective optical pathes in a manner such that they interfere at a first predetermined position;
- modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and
- placing a photosensitive waveguide at the predetermined position so as to form the grating structure comprising different order gratings super-imposed at the



**ART 34 AMDT**

1a

predetermined position through refractive index changes induced in the photosensitive waveguide.

5 In at least preferred embodiments of the present invention, the interference of the three coherent beams can facilitate the writing of grating structures which have a

non-sinusoidal profile, i.e. a non-sinusoidal refractive index profile can be induced in the photosensitive waveguide.

In alternative embodiments, the present invention can provide a method that facilitates the writing of superimposed different order gratings in one writing process. In other words, the interference of the three coherent beams in itself can effect the "simultaneous" writing of different order gratings.

10 In one embodiment, the step of dividing the input beam comprises diffraction of the input beam. The dividing of the input coherent beam into three coherent beams may utilise a phasemask. The three coherent beams may be made up from two first order diffracted beams and one zero order  
15 diffracted beam.

In another embodiment, the dividing of the input coherent beam utilises at least two mirrors of less than 100% reflection. The transmission along the optical pathes utilises at least two refractive elements for reflecting  
20 two of the beams so as to direct them to the predetermined position.

The method preferably can comprise the step of tuning a period of the resulting grating structure. The tuning of the period can be effected through tilting of the or  
25 reflective elements utilised in the transmitting of the three coherent beams.

Advantageously, the method can comprise the step of tuning a shape of the resultant refractive index profile in the photosensitive waveguide. The tuning of the shape can  
30 be effected by adjusting the relative intensities of the interfering three coherent beams.

In a preferred embodiment, the method comprises the step of switching between the writing of different order gratings. The switching can be effected by selectively  
35 blocking out at least one of the three coherent beams. Accordingly, grating structures in which regions of e.g.

5 grating.

comprising the steps of:

- modulating/adjusting the intensity of the zero order beam transmitted by the phase mask such that a grating structure comprising different order gratings superimposed is created through refractive index changes induced in the photosensitive waveguide.

direction of the wave guide.

The grating structure may comprise a first order  
25 grating.

grating.

Preferably, the grating structure comprises different order gratings superimposed. The grating structure may  
30 comprise a first and second order gratings superimposed.

apparatus comprising:

- 35        - means for dividing an input coherent light beam into  
at least three coherent beams;

- means for modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams;  
and

- an optical circuit for transmitting each of the three coherent beams to a predetermined position so as to form an interference pattern at the first predetermined position for, in use, writing the grating structure comprising different order gratings super-imposed through refractive index changes induced in the photosensitive waveguide.

Preferably, the apparatus comprises at least one modulation means for modulating/adjusting the phase and/or intensity of one of the beams relative to the others.

The means for dividing the input beam may comprise  
15 diffraction means.

The three beams may comprise the zero order diffraction and two first order diffraction beams.

In accordance with another aspect of the present invention, there is provided an optical filter comprising a grating structure written in accordance with the methods of  
20 the present invention.

Preferably, second order modulation in the grating structure results, in use, in the emission of filtered light energy substantially perpendicular to a core axis of the waveguide.

The filter may comprise a chirped second order grating which transmits predetermined wavelengths of light energy substantially perpendicular to a core axis of the waveguide and at predetermined positions along the waveguide.

30           The grating structure may comprise a grating  
comprising a first order grating and the second order  
grating superimposed.

In one application, the filter can be utilized in a spectrographic device. In another application, the waveguide can comprise a distributed feed back laser or distributed Bragg reflectance laser and the filtered light

ART 34 AMDT

4a

energy forms the emission from the laser. In a further application, the second order grating structure can comprise a series of separate spaced apart second order

WO 01/06280

PCT/AU00/00839

5

gratings. In a further application, the grating structure can be formed with a spatially varying amount of zero order modulation along its length.

5 In accordance with another aspect of the present invention, there is provided an optical free space coupler comprising a first grating structure written in accordance with the methods of the present invention.

10 Preferably, the first grating structure is formed within a first optical waveguide and is arranged to provide the emission of filtered light energy substantially perpendicular to a core axis of the first waveguide; and a second grating structure formed within a second optical waveguide placed in the path of emission of the filtered light energy can couple a portion of the filtered light  
15 energy along the second optical waveguide, and wherein at least one of the first or second grating structures comprises a second order grating.

20 At least one of the first or second grating structures may comprise a first order grating and a second order grating superimposed.

The coupler can be used as a sensor when a sample volume is used through which the filtered light energy passes before coupling with the second second order grating. Portions of the first waveguide or the second  
25 waveguide are preferably coated with a reflective material which concentrates the filtered light energy along a predetermined path of transmission from the first second order grating to the second second order grating.

30 In accordance with another aspect of the present invention there is provided an optical sensor comprising a grating structure written in accordance with the methods of the present invention.

The grating structure preferably comprises a second order grating formed within an optical waveguide, the  
35 grating structure having a predetermined second order modulation so as to provide for the reciprocal emission of

WO 01/06280

PCT/AU00/00839

6

optical energy substantially perpendicular to the optical waveguide; the sensor further comprising an optically sensitive material spaced adjacent to the optical waveguide, the material having optical reflective properties variable in accordance with an external physical parameter, the material reflecting the emitted optical energy from the grating structure back to the grating structure.

The grating structure may comprise a first order grating and the second order grating superimposed.

In accordance with another aspect of the present invention there is provided a grating structure written in accordance with the methods of the present invention into an optical fibre.

In accordance with another aspect of the present invention there is provided a device for suppressing ripples in a dispersion compensator in an optical fibre, the device comprising a grating structure written in accordance with a methods of the present invention for providing an optical loss mechanism to effect the suppressing of the ripples.

Preferably, the grating structure comprises a second order grating.

The grating structure may comprise a first order grating and a second order grating superimposed.

In accordance with another aspect of the present invention there is provided a dispersion compensator for compensating dispersion in an optical fibre, the compensator comprising a grating structure written in accordance with a methods of the present invention for providing an optical loss mechanism for suppressing ripples.

Preferably, the grating structure comprises a higher order grating.

The grating structure may comprise a second order grating.

The grating structure may comprise a first order grating and a second order grating superimposed.

In the aforementioned arrangements, the grating structure can be formed offset from a central axis of the optical waveguide so as to provide directional perpendicular emission. Furthermore, it will be appreciated by a person skilled in the art that other higher order grating structures (i.e. higher than second order) may be utilised. In the description of preferred embodiments given below, calculations are presented for second order gratings (and gratings formed from first order and second order gratings superimposed). It will be appreciated that similar calculations can be performed for higher order gratings, however, it is noted that the loss characteristics will vary between different higher order gratings. E.g. the angular directionality of the loss will differ.

Where the three coherent beams comprise a zero order and two first or higher order diffraction beams, where the grating structure can be formed with a spatially varying amount of zero order modulation along its length.

#### Brief Description of the Drawings

Notwithstanding any other forms which may fall within the scope of the present invention, preferred forms of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:

Fig. 1 is a schematic illustration of the operation of a second order grating;

Fig. 2 illustrates a first grating writing system for writing second order gratings;

Fig. 3 illustrates a second possible grating writing system for writing second order gratings;

Fig. 4 is an intensity graph having different zero orders;



Fig. 5 illustrates the perpendicular radiation modes for a second order grating;

Fig. 6 illustrates a series of graphs showing amplifier gain manipulation through filtering;

5 Fig. 7 is a schematic illustration of an example application of a second order grating;

Fig. 8 is another example illustration of an application of a second order grating;

10 Fig. 9 illustrates a further application of a chirped second order grating;

Figs 10 and 11 illustrate a laser application of a second order grating;

Fig. 12 illustrates a further application of a second order grating;

15 Fig. 13 illustrates the utilisation of second order gratings for waveguide coupling.

Fig. 14 illustrates a second order grating application to distribute emissions;

20 Fig. 15 illustrates the process of writing a second order grating on one side of a waveguide;

Figs 16 and 17 illustrate a sensing application of second order gratings;

Figs 18 and 19 illustrate an alternative sensor application;

25 Fig. 20 illustrates a further application of second order gratings;

Fig. 21 illustrates the alteration of zero order component in a grating structure.

30 Description of the preferred and other embodiments

In the preferred embodiment, a grating structure is created which allows for the emission of optical energy substantially perpendicular to the grating structure. This is provided through the utilisation of high order coupling  
35 to radiation modes out of the gratings.

Turning initially to Fig. 1, there is illustrated an optical fibre 1 having a grating structure 2 with light being transmitted along the core 3 of the fibre and the grating 2 reflecting a portion of the light in addition to transmitting a portion 5 in a perpendicular direction.

A guided light wave travelling along the fibre 3 with a propagation constant  $\beta_g$  will interact with the Fourier components of the grating 2 to excite radiation modes with propagation constant  $\beta_r \approx \text{Re}(\beta_g) - 2\pi p/\Lambda$  ( $p = \pm 1, \pm 2, \dots$ ) where  $\Lambda$  is the grating period. Radiation modes with propagation constant  $\beta_r$  only exist if  $|\beta_r| < 2\pi n_2/\lambda$ , where  $\lambda$  is the free space wavelength and  $n_2$  is the cladding index of the fibre 1. Therefore, in a first-order grating with  $\text{Re}(\beta_g) \approx \pi/\Lambda$  and  $2\pi n_2/\lambda < \text{Re}(\beta_g) < 2\pi n_1/\lambda$ , no radiation modes can be excited. However, for blazed gratings and higher order gratings this is no longer the case. Blaze is readily removed with accurate alignment in most writing setups and is therefore not a major consideration. On the other hand, for a second order grating,  $\text{Re}(\beta_g) \approx 2\pi/\Lambda$ . This means that for  $p = \pm 1$  the guided mode propagating both backwards and forwards in the grating will couple with radiation modes for which  $\beta_r \approx 0$ . For a radiation mode with propagation constant  $\beta_r$ , the radiation angle in the cladding layer is given by:

$$\theta = \arccos \left[ \frac{\beta_r}{(2\pi n_2 / \lambda)} \right] \quad (\text{Eq. 1})$$

The radiation angle in the second order grating is therefore  $90^\circ$  and first-order radiation loss will occur. Strong directionality is expected. The amount of loss will be dependent on a number of factors including index modulation, index modulation profile and penetration of UV-induced index change across the waveguide core which determines the intensity profile of radiation loss around the waveguide - analogous to the behaviour predicted with

different tooth-shaped index profiles in semiconductor radiation-coupled gratings and also previously experimentally observed in fibre gratings. The presence of a 2nd order grating therefore can lead to significant light  
5 coupled out of the side of a Bragg grating.

In one embodiment of the invention, second order gratings can be constructed through the utilisation of the zero order diffraction mode when writing the grating.

A number of different techniques for utilising the  
10 zero order are possible. In one embodiment, a three or more beam interference arrangement as schematically illustrated in Fig. 2 can be used. An initial coherent beam 10 is being projected through a phase mask 11 so that three beams including a zero order beam 12 and two first  
15 order beams 13, 14 are output. The two beams 13, 14 are reflected by a mirror 15, 16 so as to interfere at point 17 so as to produce an interference pattern. A photosensitive fibre 18 is placed at this point such that the interference pattern is imprinted in the fibre, normally by way of  
20 reflective index variation in accordance with the interference pattern. In the preferred embodiment, the zero order beam 12 is also projected onto the fibre at the same point 17 so as to provide for a second order grating to form a hybrid grating comprising first and second order  
25 gratings. Preferably, an attenuator 21 and phase modulation or attenuation elements 20, 22 are provided so as to control the amount of the zero order relative to the first order in addition to controlling the phase of the pattern formed on the optical fibre 18. In this manner,  
30 chirping and other effects can be produced in addition to a controlled mixing of the amount of the zero order beam.

Other arrangements are possible which control the amount of zero order beam. For example, in Fig. 3, there is illustrated schematically a "direct writing" system  
35 wherein a phase mask 30 is provided and a fibre 31 is placed behind the phase mask. A coherent UV beam 32 is

swept along the phase mask which produces a first order  
interfering beam 34, 35 in addition to a zero order beam  
36. In the arrangement of Fig. 3 varying the depth of the  
phase mask 30 can be used to alter the amount of zero order  
5 beam.

Hence, in the preferred embodiments, a super structure  
grating of both first and second order periodicities is  
formed utilising the zero order and first order beams.

The basic premise in the mechanism arises from  
10 significant zero order interaction with the +1 and -1  
diffraction orders of a phase mask. The angle of each  
diffracted beam,  $\theta_m$ , can be calculated from the expression  
for monochromatic light incident on a diffraction grating:

$$\sin \theta_n = \sin \theta_i + m \frac{\lambda}{\Lambda} \quad (\text{Eq. 2})$$

15 where  $\theta_i$  is the angle of the incident beam ( $0^\circ$  when normal  
to the diffraction grating),  $m$  is the diffraction order,  $\lambda$   
is the writing wavelength, and  $\Lambda$  is the phase mask period.  
Using the appropriate angles, the period is  $\Lambda_{m,n} = \lambda / \sin$   
( $\theta_{m,n}$ ), where  $\theta_{m,n}$  is the angle between the two orders. This  
20 expression is similarly derived to that in equation (1).  
To determine this amplitude the intensity can be calculated  
by squaring the sum of the real and complex components of  
the individual amplitudes,  $a_N$ , where  $N$  is the diffraction  
order of the phase mask:

$$25 \quad I = |a_0 \exp(jk x \sin \theta_0) + a_1 \exp(jk x \sin \theta_1) + a_{-1} \exp(jk x \sin \theta_{-1})|^{-2} \quad (\text{Eq. 3})$$

The angular quantity,  $\theta_N$ , which determines the phase  
of each wave, is obtained from

$$\theta_n = \sin^{-1} \left( \frac{N\lambda}{nd} \right) \quad (\text{Eq. 4})$$

where  $d$  is the phase mask period (specified in experiments  
30 as  $1.064\mu\text{m}$ ). The above formulation calculates the electric  
field distribution immediately after the phase mask. This  
is suitable for direct contact printing of gratings on rib

waveguides but in most instances an additional term in the amplitude of each wave is required for buried waveguides and optical fibres where the core is at a distance from the phase mask determined by a cladding. Talbot planes away  
5 from the phase mask surface, which can have a period with dimensions less than the waveguide, are neglected.

Fig. 4 shows the calculated intensity distribution arising from the interactions between the 0, +1, and -1 orders for varying amounts of zero order. Assuming most of  
10 the incoming light is in these orders the intensity at the peaks of the interference between these orders will always be substantially larger than the intensity of the incoming light. Notably, even when the zero order is only 1% of the input light a substantial peak intensity maximum occurs  
15 every  $1\mu\text{m}$ . Since the phenomenological growth of index with UV is often not linear, this disparity can be much larger when examining the generated index profile. Fig. 5 is a schematic of such a small complex grating with a small amount diffracted light coupling to radiation modes with  $\beta_r$   
20 = 0.

As a consequence of this superposition of the interference between the zero order and the +1 and -1 orders, there exists a component of a 2nd order grating. Diffraction at the Bragg wavelength of the first order  
25 grating occurs at ninety degrees at those wavelengths satisfying the criterion of twice the pitch of the Bragg grating; i.e.

$\Lambda_{2\text{nd}} = \Lambda_B / N - 2\Lambda_B$ . The relative intensity depends on the ratio of the peak index amplitude of the 2nd order grating  
30 with that of the Bragg grating:  $\Delta n_{2\text{nd}} / \Delta n_B$ . To quantify the expected losses systematic and careful measurements of a number of parameters, including grating growth curves and the intensities of diffracted phase mask orders, is required. However, the losses in these complex combination  
35 gratings superstructures will always be less than that of a

strong pure second order grating that can couple up to 3dB of its light to radiation modes orthogonal to the grating axis.

The second ordered grating structure can therefore be utilised in a number of ways in different photonics devices through appropriate control of the zero order component of any beam. Various devices will be discussed herein after under separate headings.

## 10 Filters

Often, it is necessary to provide for filtering of optical signals. In one particularly common case is the gain flattening of, for example, Erbium doped fibres. The gain of an Erbium doped fibre tends to vary with wavelength and is shown schematically 40 in Fig. 6. It is obviously desirable to provide for the same level of gain across a wide bandwidth. It is also desirable to provide a variable filter such that the gain is substantially constant 41 across a wavelength. Such a filter can be constructed as illustrated in Fig. 7 wherein a second order grating 45 is formed in a fibre 46. The grating 45 can be a chirped grating having predetermined reflectance criteria at different frequencies. The grating is also modulated by a zeroth order beam so as to radiate e.g. 47 variable mounts of light with the degree of radiation of the beam being higher when high levels of gain are present at the particular wavelength. In this manner, a superstructure of first and second order gratings can be written so as to radiate energy and therefore provide for gain flattening. The resulting output 48 is a gain flattened narrow band response. The arrangement of Fig. 7 can also be configured to operate in a transmission mode. Advantageously, it has low sensitivity to cladding mode variations.

## 35 Spectrometers

The principle of Fig. 7 can be extended to the construction of a spectrometer type device. Such an arrangement is illustrated in Fig. 8 wherein a chirped grating 50 is provided having both first and second order grating structures. Hence, different wavelengths e.g. 51, 52, 53 will be emitted in a perpendicular direction depending on the periodicity of the chirp. The arrangement of Fig. 8 can hence be utilised in spectrometric analysis or in wavelength division multiplexing filters. The arrangement of Fig. 8 can be extended to a planar waveguide form as illustrated in Fig. 9 wherein a wave guide 60 contains a chirped grating structure 61 which emits wavelengths  $\lambda_1$ ,  $\lambda_2$ ,  $\lambda_3$ ,. Three collectors 63 - 65 are provided for collecting the emitted light which can be forwarded for analysis. Hence, the input light 66 will be divided into its wavelength channels.

#### Surface emitting gratings

The construction of superimposed grating structures can be extended to the formation of surface emitting grating structure for use in lasers etc. An initial example of an arrangement is as illustrated in Fig. 10 wherein a laser structure 70 is provided with distributed Bragg reflectors 71, 72. A pump input causes the intermediate portion 74 to lase and a second order grating 75 of the superimposed grating structure 77 is provided for the emission 76 of the laser light, whilst the first order grating 72 of the superimposed grating structure 77 reflects.

Fig. 11 illustrates an alternative arrangement wherein a separate superimposed grating structure 80 is provided for laser emission. The arrangement of Figs 10 and 11 can be extended to a distributed feedback (DFB) laser with the second order grating providing an interruption of the degeneracy of side mode. This allows for a large area pump

lasers for integrated optics with easy coupling and high powers.

The superimposed grating structure can be utilised as illustrated in Fig. 12, as enlarged area "semi-coherent" emitter for utilisation as a sensor source etc.

#### Free Space Couplers

The utilisation of second order gratings can be extended to providing for free space coupling. A suitable arrangement as illustrated in Fig. 13 where it is desired to couple input light 81 transmitted along fibre 82 to a planar waveguide structure 84 having internal waveguide 83. A second order grating 86 is constructed in one end of the fibre 82 which also contains a reflective coating 87. The reflective coating reflects the light outputted perpendicular to the fibre 82 down to the waveguide 83 wherein a further second order grating 88 is formed. The grating 88 couples with the emitted light via the principle of reciprocity into the waveguide where it is output 83.

#### Control of Beam Divergence for Filters, Lasers, etc.

The principle of superimposed grating structures can be extended as illustrated in Fig. 14 to provide for a larger effective aperture through the utilisation of multiple second order gratings e.g. 90 - 94. A larger aperture or extended grating structure means less divergence and a quasi coherent output is possible from incoherent sources.

Ideally, to provide enhanced directionality, the side of transmission perpendicular to the waveguide is controlled. This can be achieved by writing gratings on one side of the waveguide. Such an arrangement is illustrated in Fig. 15 where a waveguide structure is shown 100 where light is transmitted along the waveguide 101 and a series of second order gratings e.g. 102 are provided on a first side of the waveguide 101. This results in a



transmission perpendicular to the waveguide structure. This allows for complex integrated optic structures to be produced on a planar waveguide.

#### 5 Large Areas Sensor Heads

The superimposed higher order grating principle can be extended to sensor heads with an example illustrated in Fig. 16 and 17. A waveguide 110 is provided having a second order grating 111. Preferably, a reflective coating is formed around predetermined portions of the fibre 110 so as to reflect light downwards through a volume 113 which is to be sampled. A second fibre 115 is provided which couples the light travelling through the volume 113 to output 116. Again, a reflective coating 117 is also provided for enhanced coupled. Fig. 17 illustrates a sectional view through the line A - A' of Fig. 16 and more clearly illustrates the mirror portions 112, 117 which add to enhance the degree of coupling. The wavelength absorption in volume 113 will affect the spectra of output 116 which can be separately analysed to determine sensor operation.

The arrangement of Fig. 16 and Fig. 17 can be extended as shown in Fig. 18 and Fig. 19 to the provision of wavelength specific sensors. Fig. 18 illustrates a side-view of a sensor arrangement with Fig. 19 illustrated in the corresponding sectional view taken through the line B - B' at Fig. 18. The arrangement 120 includes a second order grating 121 which transmits input light 122 in a perpendicular manner. A porous coating 123 is provided and is of a reflective type. Hence, the light reflected from the coating 123 is reflected back and coupled back by second order grating 122 where it is subsequently output 125. The reflective material 123 can be modulated to change the integrated reflection and the corresponding modulated output signal 125 returned. Alternatively, the reflective material may change properties with absorption

of a species to be identified which allows for spectral analysis of the absorbed gas via variations in the output 125. A second gratings 126 is also provided for reflecting back light via the waveguide.

5

#### Narrow Band Attenuators

The superimposed higher order grating principle can be extended to provide a novel form of attenuator. Such an arrangement is illustrated in Fig. 20, wherein a chirped 10 grating 130 is provided which includes a second order grating having controlled degrees of radiation loss to bounce an input signal 131 so as to provide bandwidth attenuation of output signal 132.

#### 15 Tunable Narrow Bend Attenuator

The arrangement in Fig. 20 can be extended by providing a chirped grating with a chirped index modulation provided by "chirping" the degree of zero order irradiation. The amount of zero order can be varied as 20 illustrated in Fig. 21 with grating position. Such a chirped grating structure can then be subjected to stretching, pressure or heating. As the structure is stretched the narrow band position will move across a series of desired wavelengths. Further, stretching or 25 compressing the grating structure will alter the amount of perpendicular radiation.

#### Dispersion Compensator

The principle of Fig. 20 can be extended to providing 30 dispersion compensation wherein the grating structure 130 is written in an Erbium doped amplifying fibre or similar amplifier. The degree of radiation also can be controlled so as to provide for simultaneous dispersion compensation and radiation loss. By utilising a combination of first 35 and second order grating structures, optimisation of the

amount of loss can be achieved. The arrangement also allows for the suppression of cavity based ripples.

#### Photonic Band Gap And Generation

5       The arrangement of Fig. 2 also allows for the formation of complex Photonic band gap structures in the interference vicinity 17. The area of interference 17 will contain a complex interference pattern which can be imprinted on a photosensitive material. Such complex  
10 arrangements can be utilised to store information for later playback. By controlling the attenuators/phase elements 20 - 22 and/or the angles of the mirrors 15, 16 arbitrary complex structures can be formed. This interference regime is analogous to the complex interference formed where  
15 Talbot & Lohmann planes are generated within the Fresnel zone just after a phase mask grating.

It would be appreciated by a person skilled in the art that numerous variations and/or modifications may be made to the present invention as shown in the specific  
20 embodiments and devices without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects to be illustrative and not restrictive.

We Claim:

1. A method of forming a grating structure in a photosensitive waveguide, the method comprising the steps of:

5 - dividing an input coherent beam into at least three coherent beams;

- transmitting the three coherent beams through respective optical pathes in a manner such that they interfere at a first predetermined position;

10 - modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and

- placing a photosensitive waveguide at the predetermined position so as to form the grating structure comprising different order gratings super-imposed at the  
15 predetermined position through refractive index changes induced in the photosensitive waveguide.

2. A method as claimed in claim 1, wherein the step of dividing the input beam comprises diffraction of the input beam.

20 3. A method as claimed in claim 2, wherein the dividing of the input coherent beam into three coherent beams utilises a phasemask.

4. A method as claimed in claims 2 or 3, wherein the three coherent beams are made up from two first order  
25 diffracted beams and one zero order diffracted beam.

5. A method as claimed in claim 1, wherein the dividing of the input coherent beam utilises at least two mirrors of less than 100% reflection.

6. A method as claimed in claims 1 or 5, wherein the  
30 transmission along the optical pathes utilises at least two refractive elements for reflecting two of the beams so as to direct them to the predetermined position.

7. A method as claimed in any one of the preceding claims, wherein the method further comprises the step of  
35 tuning a period of the resulting grating structure.

8. A method as claimed in claim 7, wherein the tuning of the period is effected through tilting of the or reflective elements utilised in the transmitting of the three coherent beams.

5 9. A method as claimed in any one of the preceding claims, wherein the method comprises the step of tuning a shape of the resultant refractive index profile in the photosensitive waveguide.

10 10. A method as claimed in claim 9, wherein the tuning of the shape is effected by adjusting the relative intensities of the interfering three coherent beams.

11. A method as claimed in any one of the preceding claims, wherein the method comprises the step of switching between the writing of different order gratings.

15 12. A method as claimed in claim 11, wherein the switching is effected by selectively blocking out at least one of the three coherent beams.

20 13. A method of writing a grating structure in a photosensitive waveguide, the method comprising the steps of:

- dividing an input coherent beam into two  $n$ th order beams and a zero order beam utilizing a phase mask, wherein  $n$ th is equal to or greater than first;

25 - placing a photosensitive waveguide substantially adjacent a surface of the phase mask where the  $n$ th order beams and the zero order beam overlap;

- modulating/adjusting the intensity of the zero order beam transmitted by the phase mask such that a grating structure comprising different order gratings superimposed  
30 is created through refractive index changes induced in the photosensitive waveguide.

14. A method as claimed in claim 13, wherein the formed grating structure comprises a grating having a non-sinusoidal profile along a light propagation direction of  
35 the wave guide.

**ART 34 AMDT**

21

15. A method as claimed in claim 13 or 14, wherein the grating comprises a first order grating.

16. A method as claimed in any one of claims 13 to 15, wherein the grating structure comprises a higher order  
5 grating.

17. A method as claimed in any one of claims 13 to 16, wherein the grating structure comprises different order gratings superimposed.

18. A method as claimed in claim 17, wherein the  
10 grating structure comprises a first and second order gratings superimposed.

19. An apparatus for writing a grating structure in a photosensitive waveguide, the apparatus comprising:

- means for dividing an input coherent light beam into  
15 at least three coherent beams;

- means for modulating/adjusting the relative phase and/or the intensity of at least one of the coherent beams; and

- an optical circuit for transmitting each of the  
20 three coherent beams to a predetermined position so as to form an interference pattern at the first predetermined position for, in use, writing the grating structure comprising different order gratings super-imposed through refractive index changes induced in the photosensitive  
25 waveguide.

20. An apparatus as claimed in claim 19, wherein the apparatus comprises at least one modulation means for modulating/adjusting the phase and/or intensity of one of the beams relative to the others.

30 21. An apparatus as claimed in claims 19 to 20, wherein the means for dividing the input beam comprises diffraction means.

22. An apparatus as claimed in any one of claims 19 to 21, wherein the three beams comprise the zero order  
35 diffraction and two first order diffraction beams.

23. An optical filter comprising a grating structure written in accordance with any one of claims 1 to 18.

24. A filter as claimed in claim 23, wherein second order modulation in the grating structure results, in use, in the emission of filtered light energy substantially perpendicular to a core axis of the waveguide.

25. A filter as claimed in claims 23 or 24, wherein the filter comprises a chirped second order grating which transmits predetermined wavelengths of light energy substantially perpendicular to a core axis of the waveguide and at predetermined positions along the waveguide.

26. A filter as claimed in any one of claims 23 to 25, wherein the grating structure comprises a grating comprising a first order grating and the second order grating superimposed.

27. An optical free space coupler comprising a first grating structure written in accordance with the method as claimed in any one of claims 1 to 18.

28. A coupler as claimed in claim 27, wherein the first grating structure is formed within a first optical waveguide and is arranged to provide the emission of filtered light energy substantially perpendicular to a core axis of the first waveguide; and a second grating structure formed within a second optical waveguide placed in the path of emission of the filtered light energy can couple a portion of the filtered light energy along the second optical waveguide, and wherein at least one of the first or second grating structures comprises a second order grating.

29. A coupler as claimed in claim 28, wherein at least one of the first or second grating structures comprises a first order grating and a second order grating superimposed.

30. An optical sensor comprising a grating structure written in accordance with the method as claimed in any one of claims 1 to 18.

31. A sensor as claimed in claim 30, wherein the grating structure comprises a second order grating formed within an optical waveguide, the grating structure having a predetermined second order modulation so as to provide for the reciprocal emission of optical energy substantially perpendicular to the optical waveguide; the sensor further comprising an optically sensitive material spaced adjacent to the optical waveguide, the material having optical reflective properties variable in accordance with an external physical parameter, the material reflecting the emitted optical energy from the grating structure back to the grating structure.

32. A sensor as claimed in claims 30 or 31, wherein the grating structure comprises a first order grating and the second order grating.

33. A grating structure written in accordance with the method as claimed in any one of claims 1 to 18 into an optical fibre.

34. A device for suppressing ripples in a dispersion compensator in an optical fibre, the device comprising a grating structure written in accordance with a method as claimed in any one of claims 1 to 17 for providing an optical loss mechanism to effect the suppressing of the ripples.

35. A device as claimed in claim 34, wherein the grating structure comprises a second order grating.

36. A device as claimed in claims 33 or 34, wherein the grating structure comprises a first order grating and a second order grating superimposed.

37. A dispersion compensator for compensating dispersion in an optical fibre, the compensator comprising a grating structure written in accordance with a method as claimed in any one of claims 1 to 18 for providing an optical loss mechanism for suppressing ripples.

38. A compensator as claimed in claim 37, wherein the grating structure comprises a higher order grating.



39. A compensator as claimed in claims 37 or 38,  
wherein the grating structure comprises a second order  
grating.

40. A compensator as claimed in any one of claims 37  
5 to 39, wherein the grating structure comprises a first  
order grating and a second order grating superimposed.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 January 2001 (25.01.2001)

PCT

(10) International Publication Number  
**WO 01/06280 A1**

(51) International Patent Classification<sup>7</sup>: G02B 5/28,  
6/13, 6/34

(72) Inventor; and  
(75) Inventor/Applicant (for US only): CANNING, John  
[AU/AU]; 10 Francis Street, Carlton, NSW 2218 (AU).

(21) International Application Number: PCT/AU00/00839

(74) Agent: GRIFFITH HACK; G.P.O. Box 4164, Sydney,  
NSW 2001 (AU).

(22) International Filing Date: 11 July 2000 (11.07.2000)

(81) Designated States (national): AU, CA, JP, KR, US.

(25) Filing Language: English

(84) Designated States (regional): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).

(26) Publication Language: English


(30) Priority Data:  
PQ 1655 15 July 1999 (15.07.1999) AU

Published:  
— With international search report.

(71) Applicant (for all designated States except US): THE  
UNIVERSITY OF SYDNEY [AU/AU]; Parramatta  
Road, Sydney, NSW 2006 (AU).



For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.



(54) Title: METHOD OF WRITING GRATING STRUCTURES


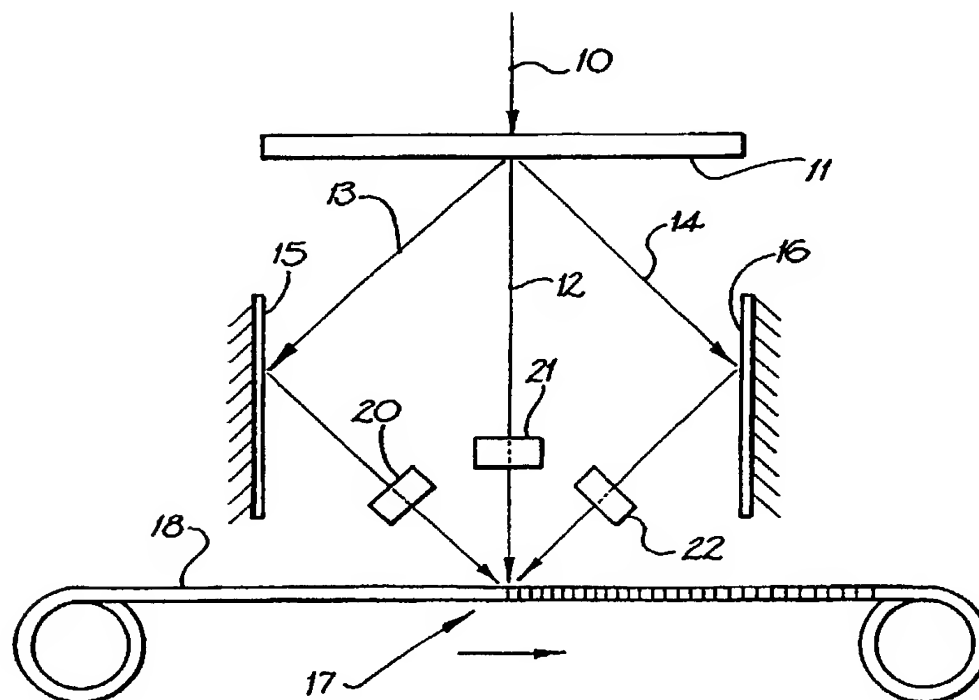


(57) Abstract: A grating structure is written in a photosensitive waveguide (17) by dividing a coherent beam (10) into at least three beams (12, 13, 14), and interfering them at the waveguide (17). The beams may comprise a zero order beam (12) and two first order beams (13, 14) diffracted by a phase mask (11), and their relative phases and amplitudes may be modulated to control and/or tune the grating period and shape. The method allows grating structures to be written in which a first order grating and a second order grating are superimposed.

WO 01/06280 A1

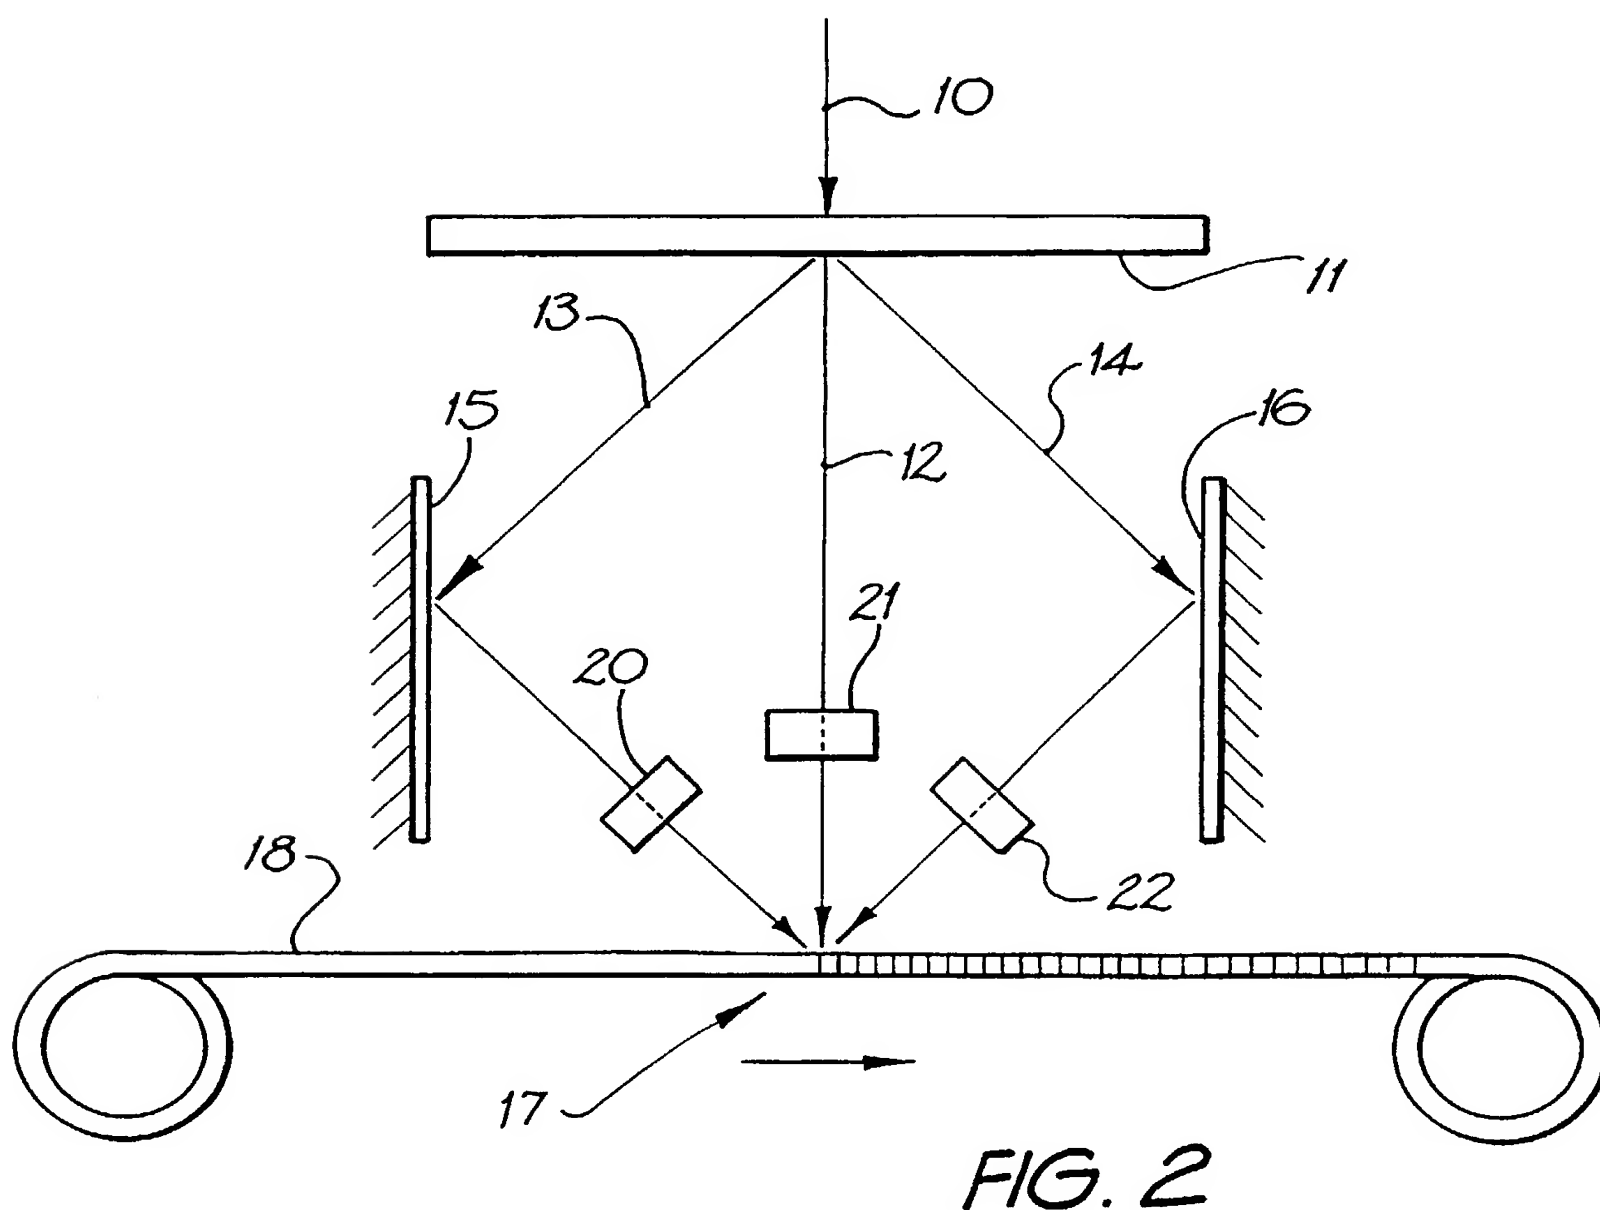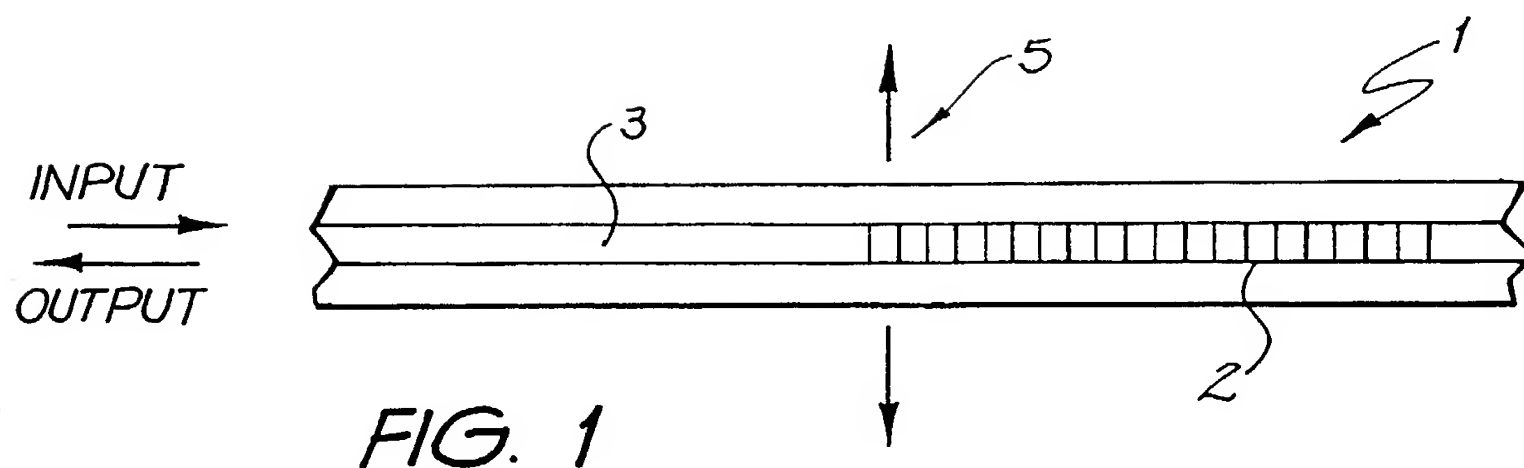

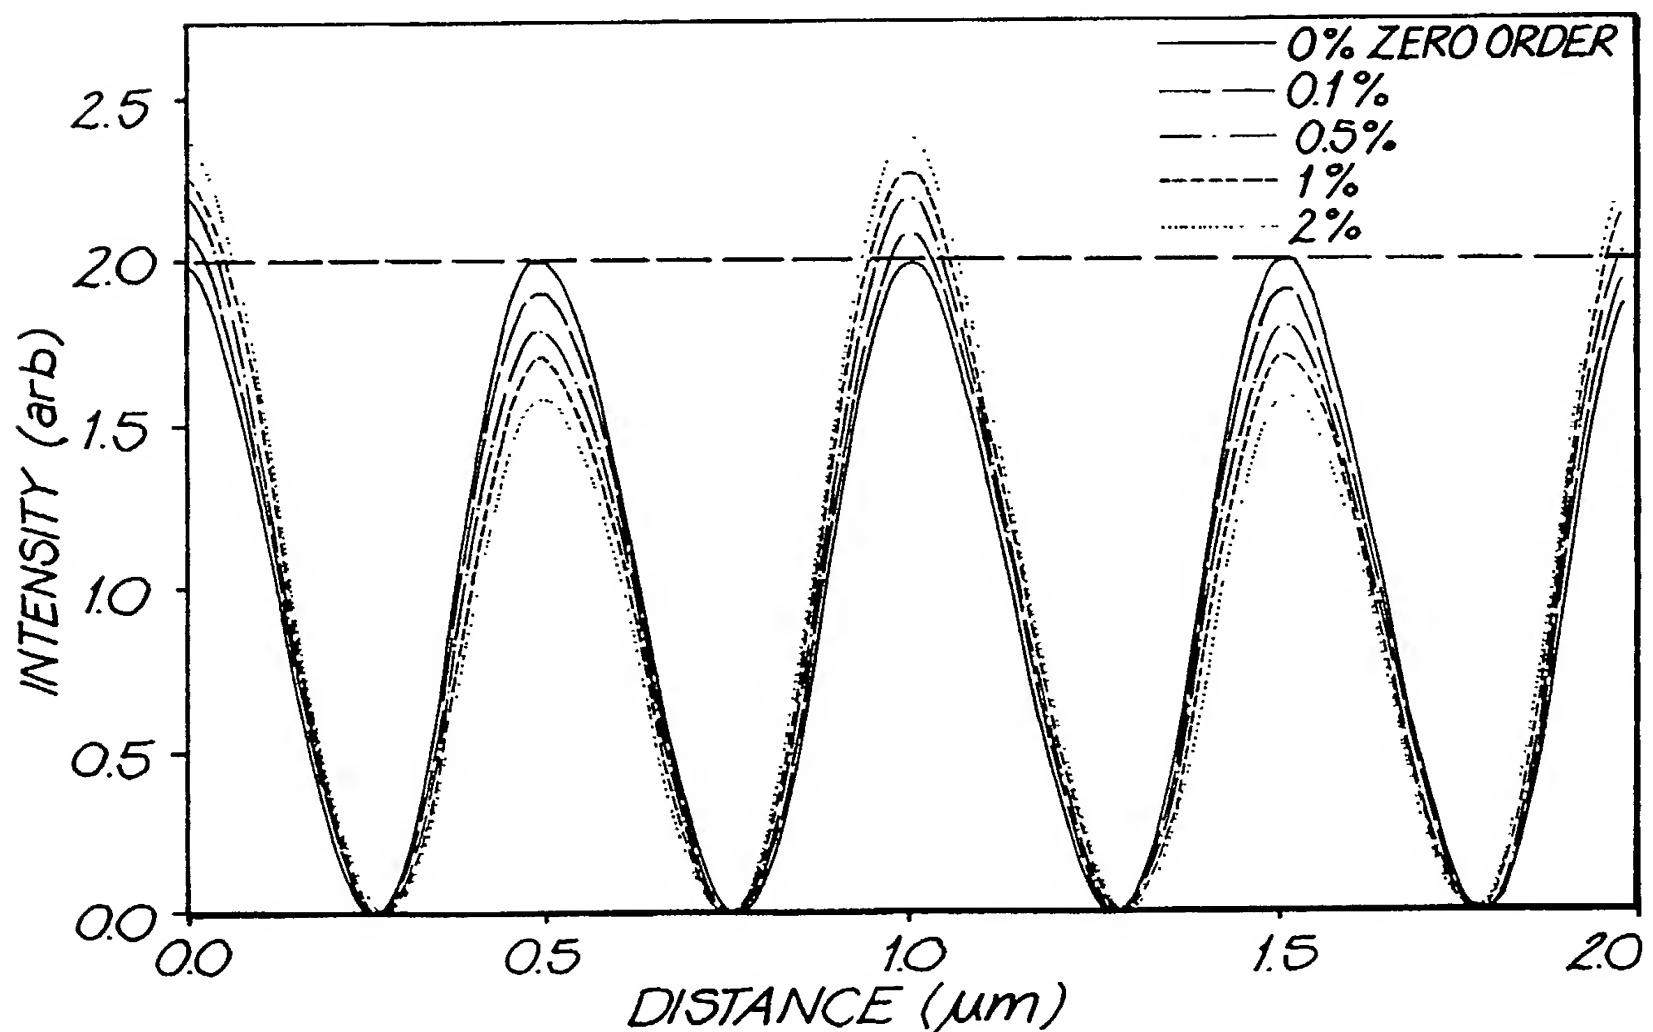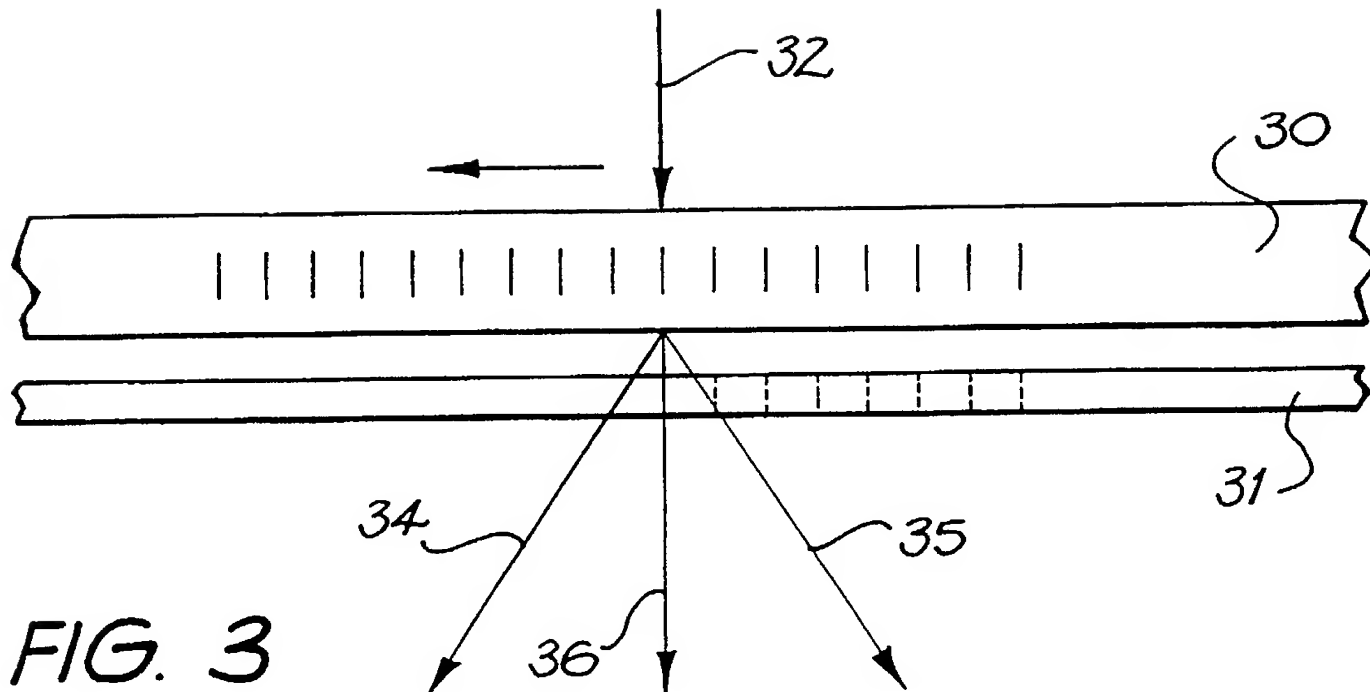

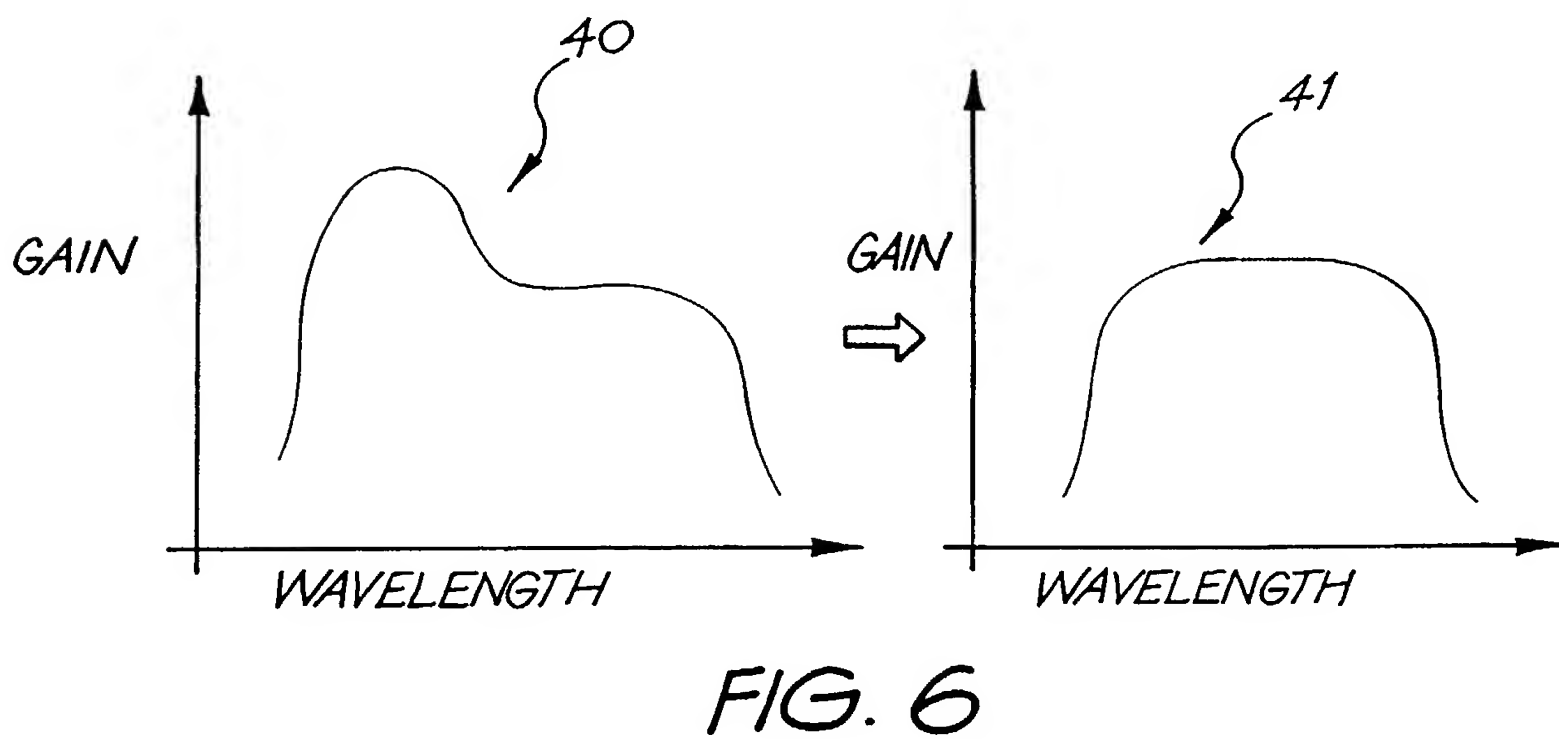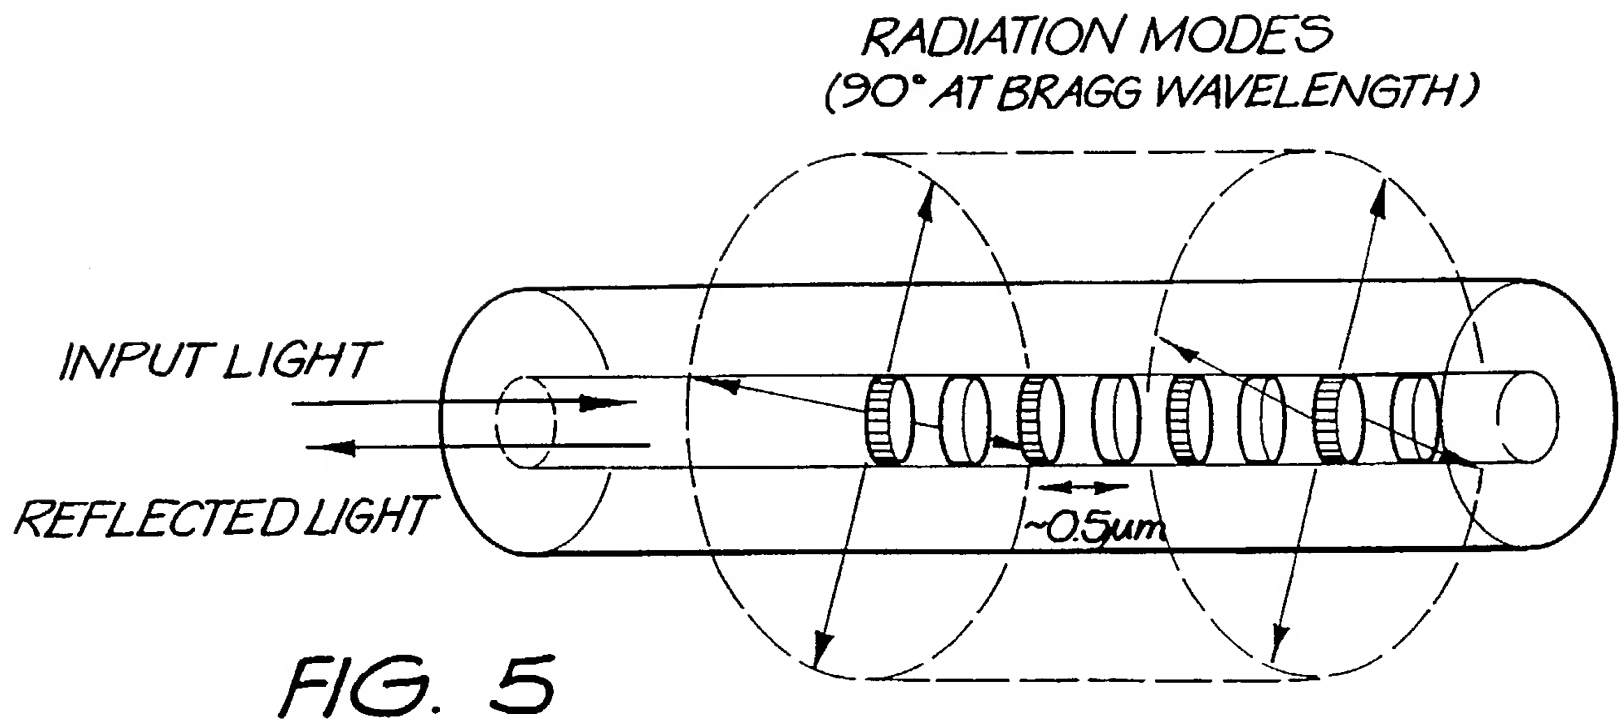

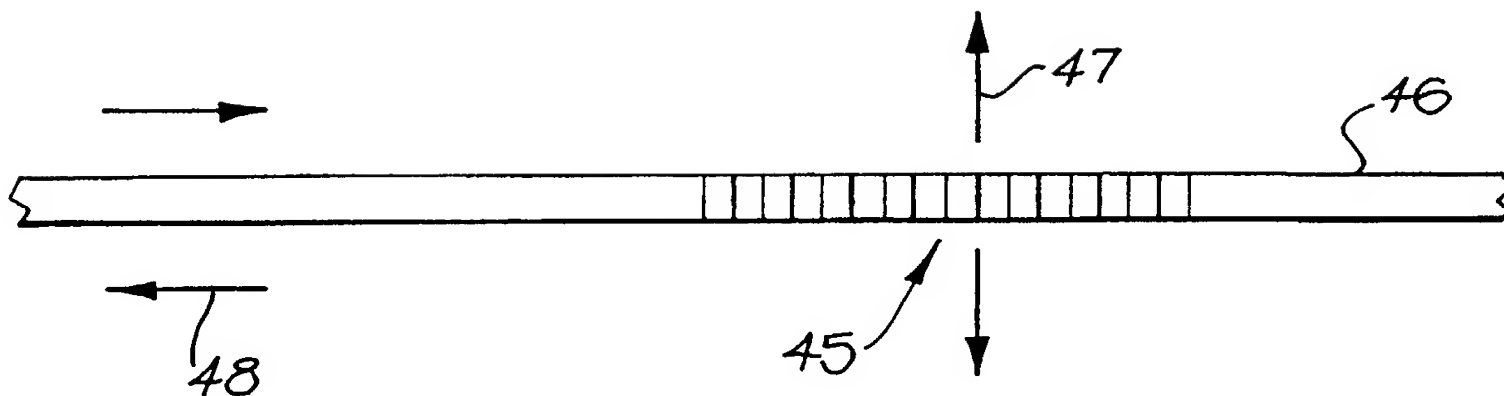


FIG. 7

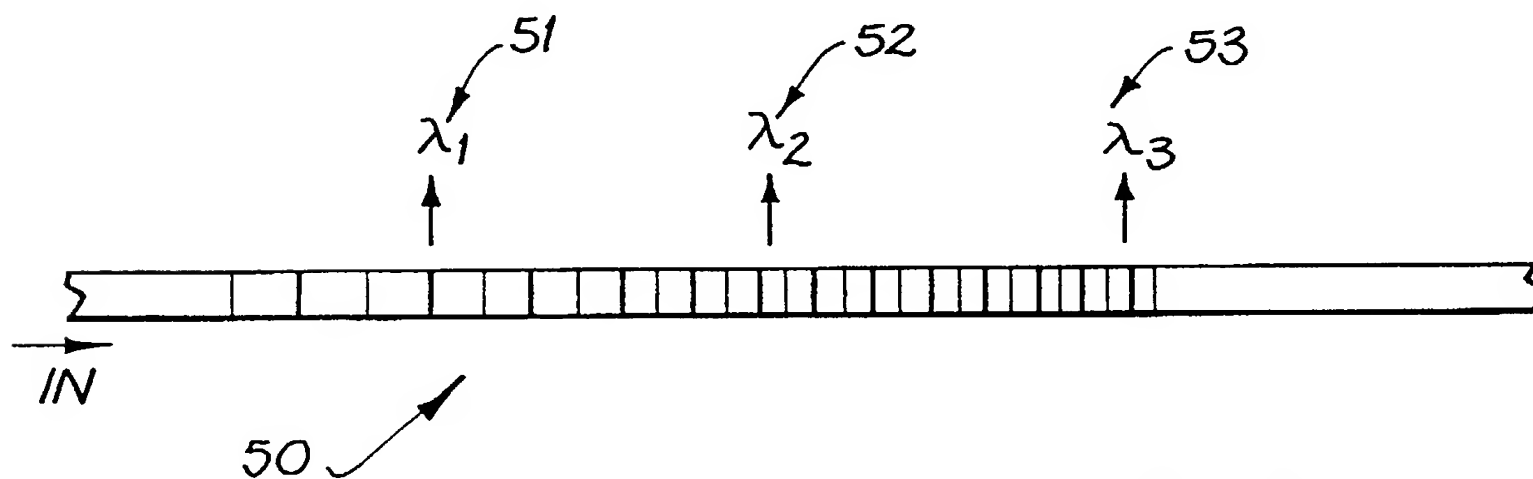
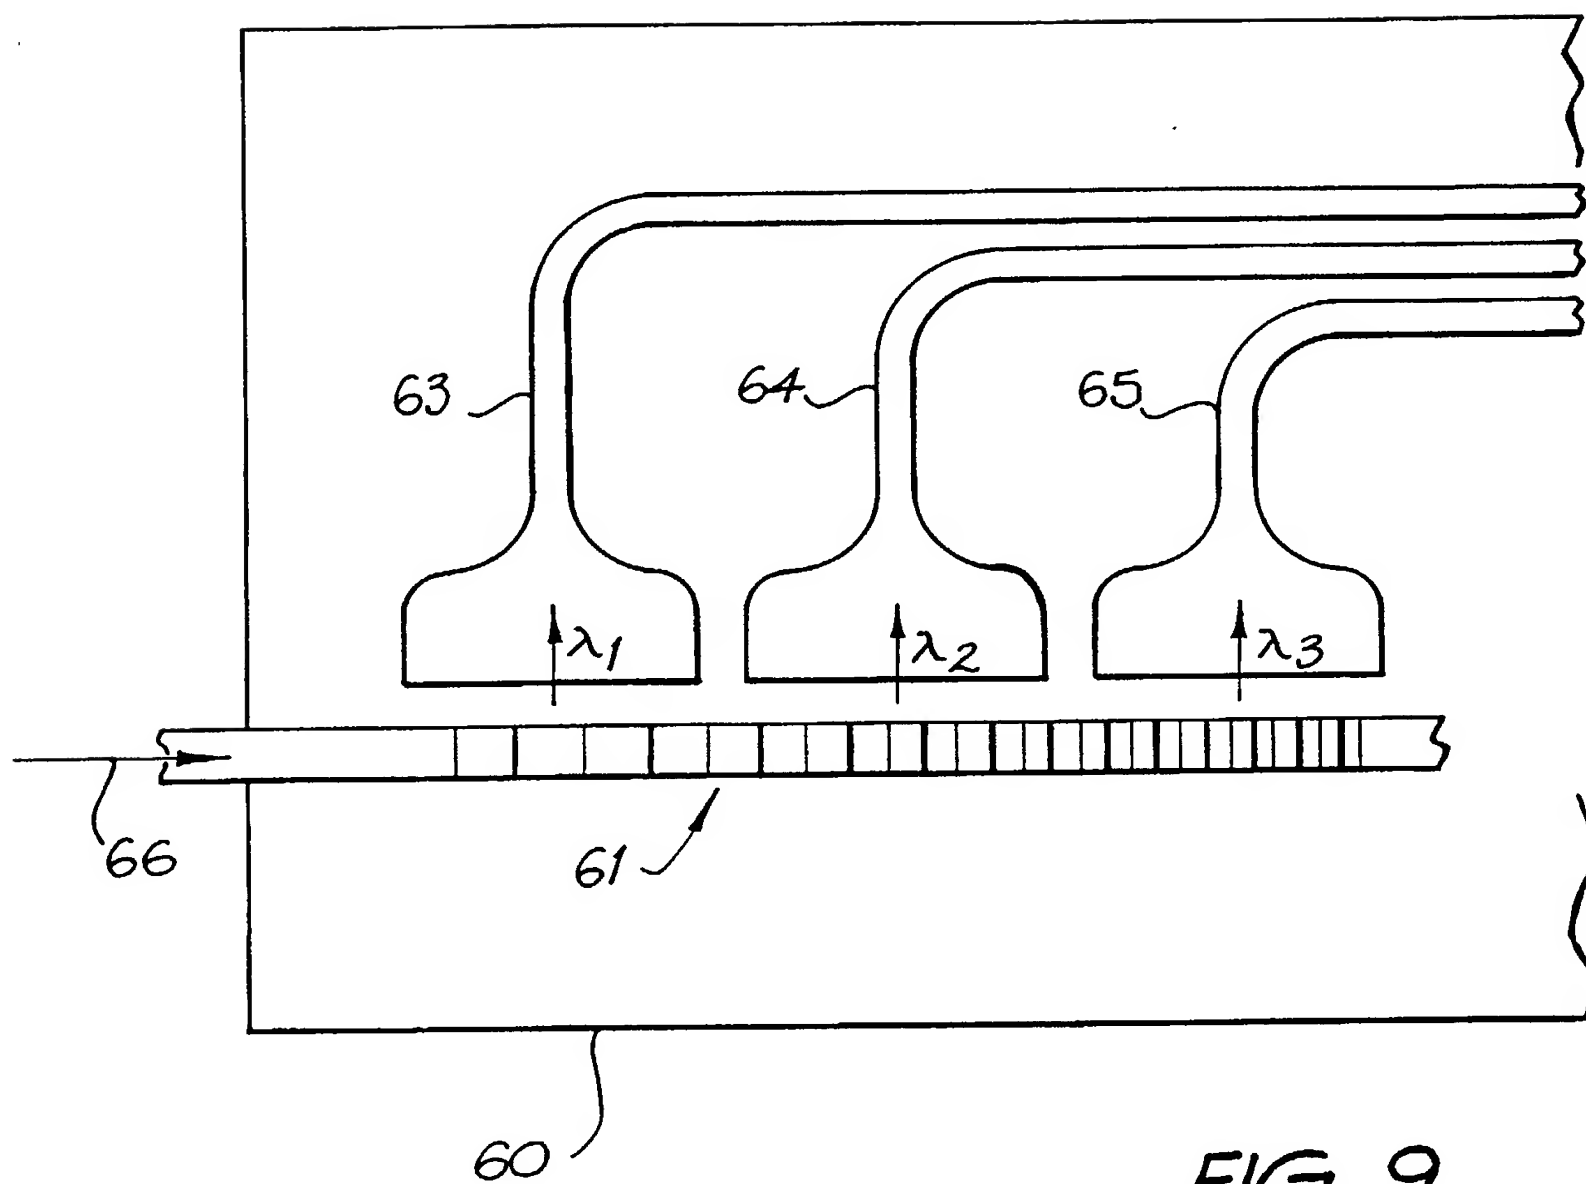


FIG. 8



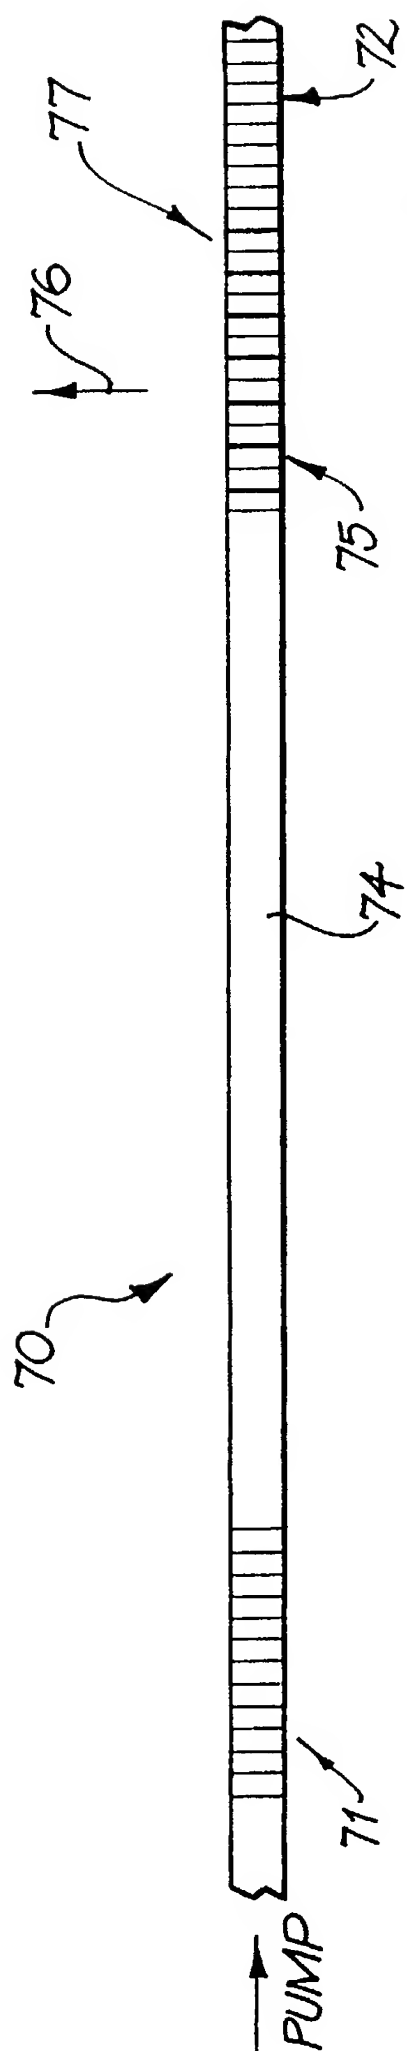


FIG. 10

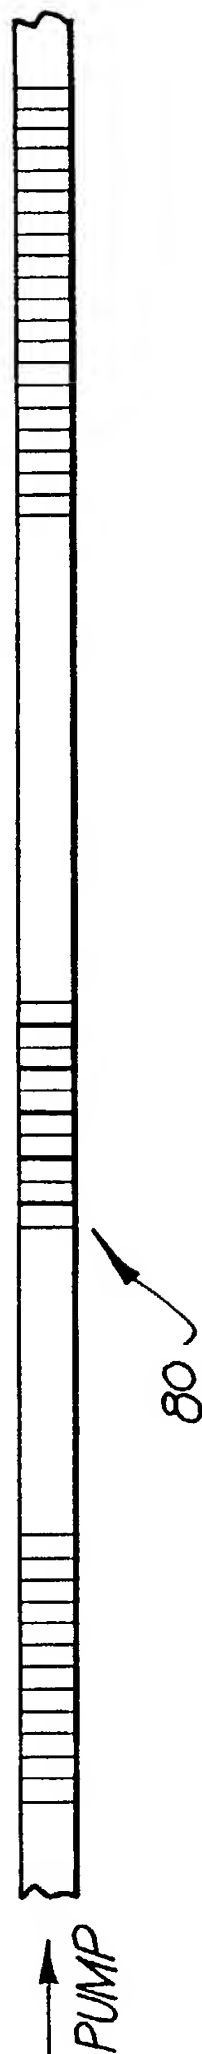


FIG. 11



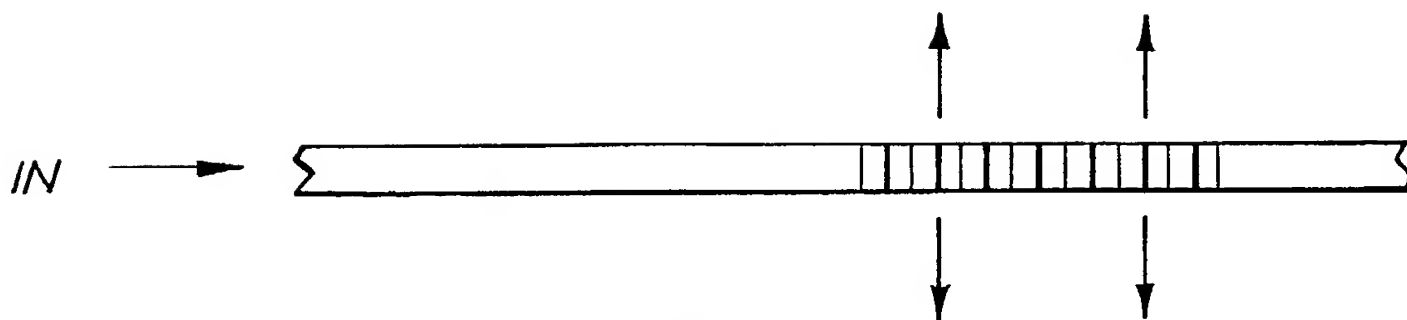


FIG. 12

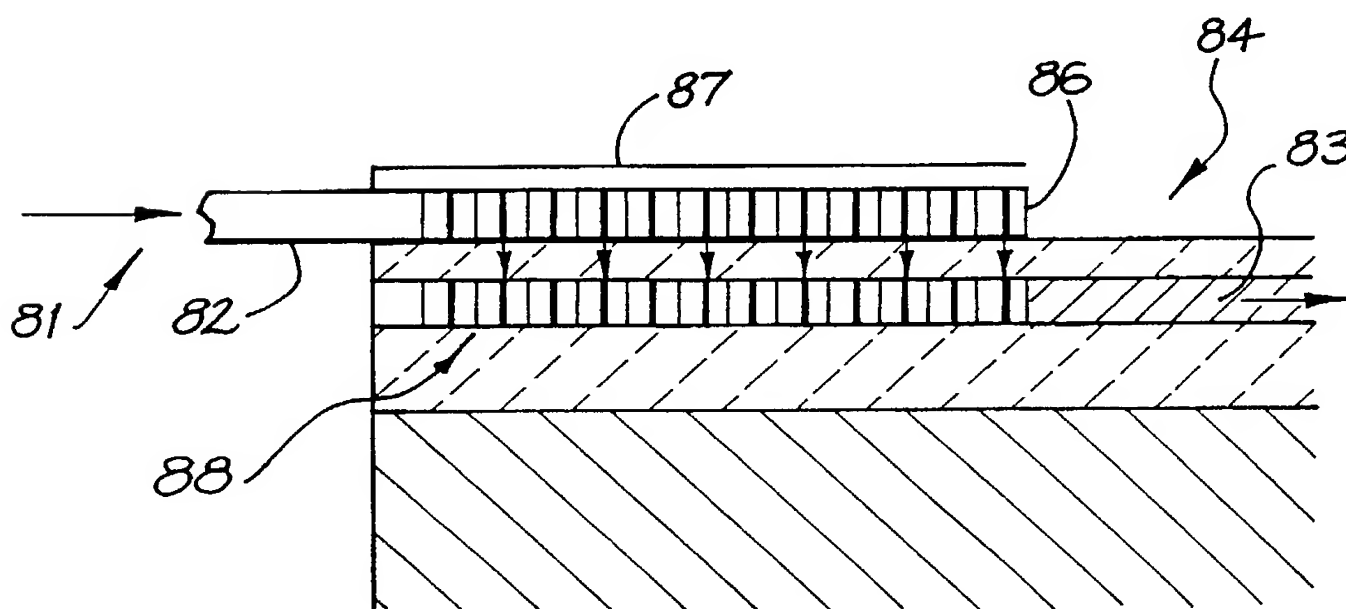
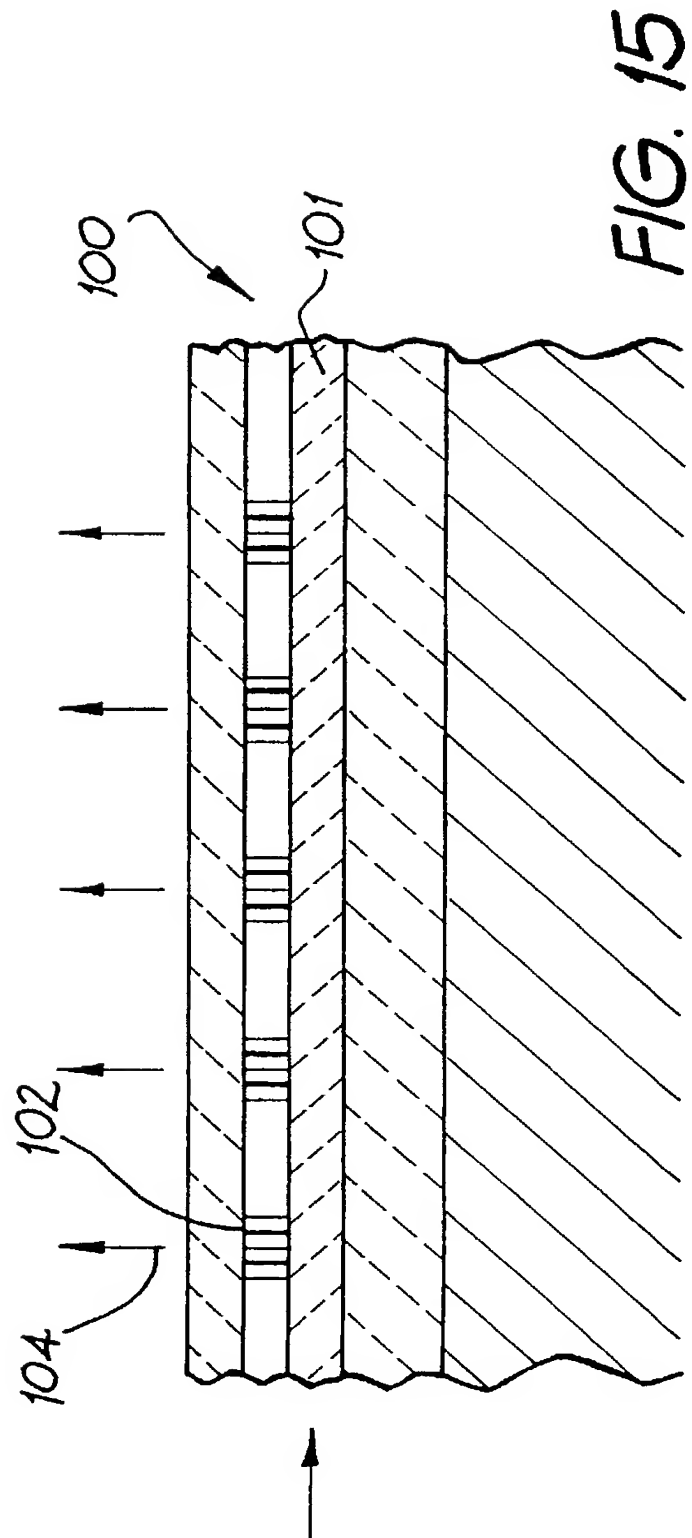
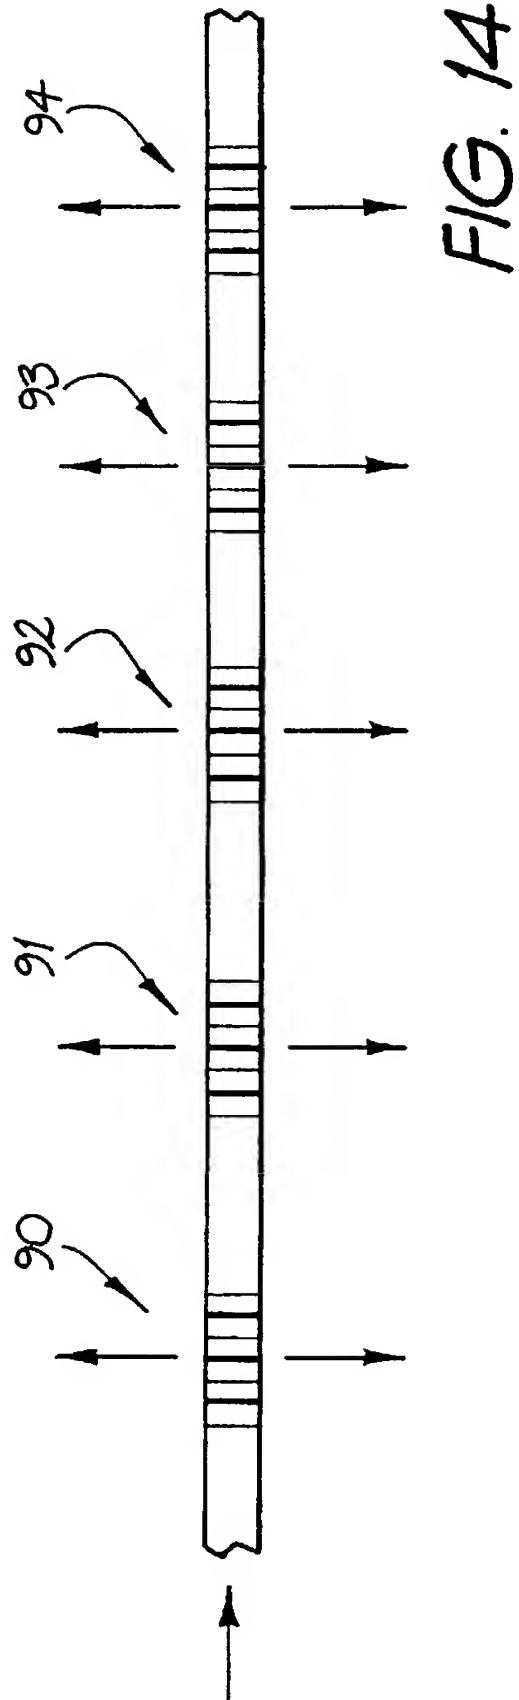


FIG. 13



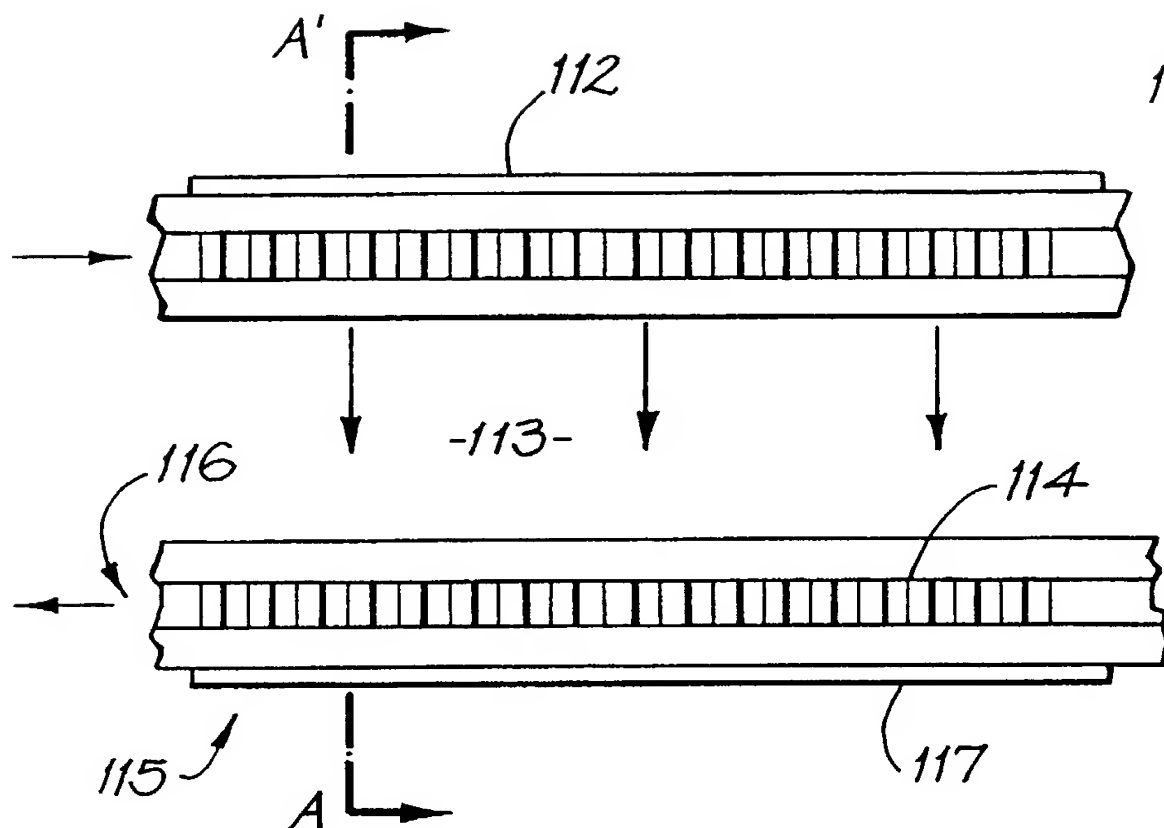


FIG. 16

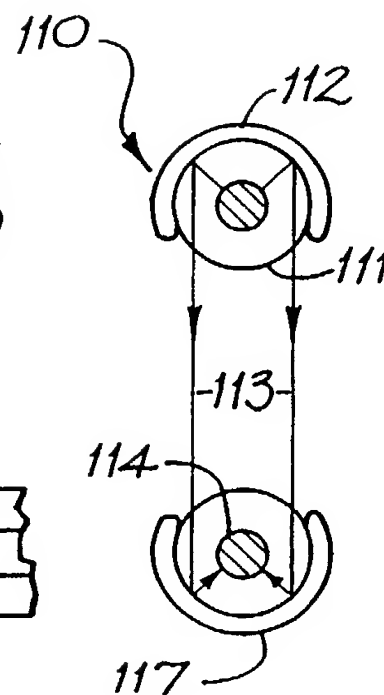


FIG. 17

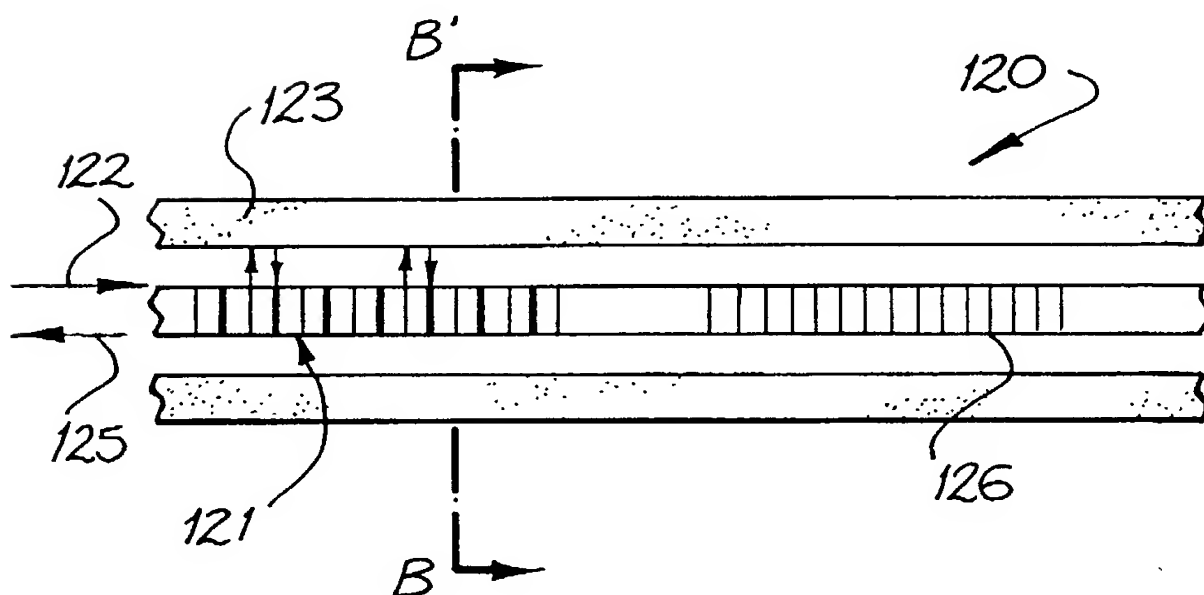


FIG. 18



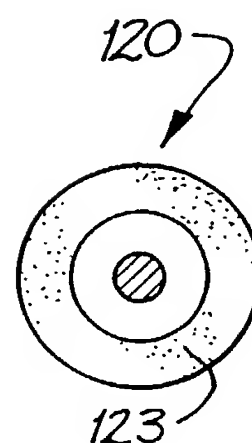


FIG. 19

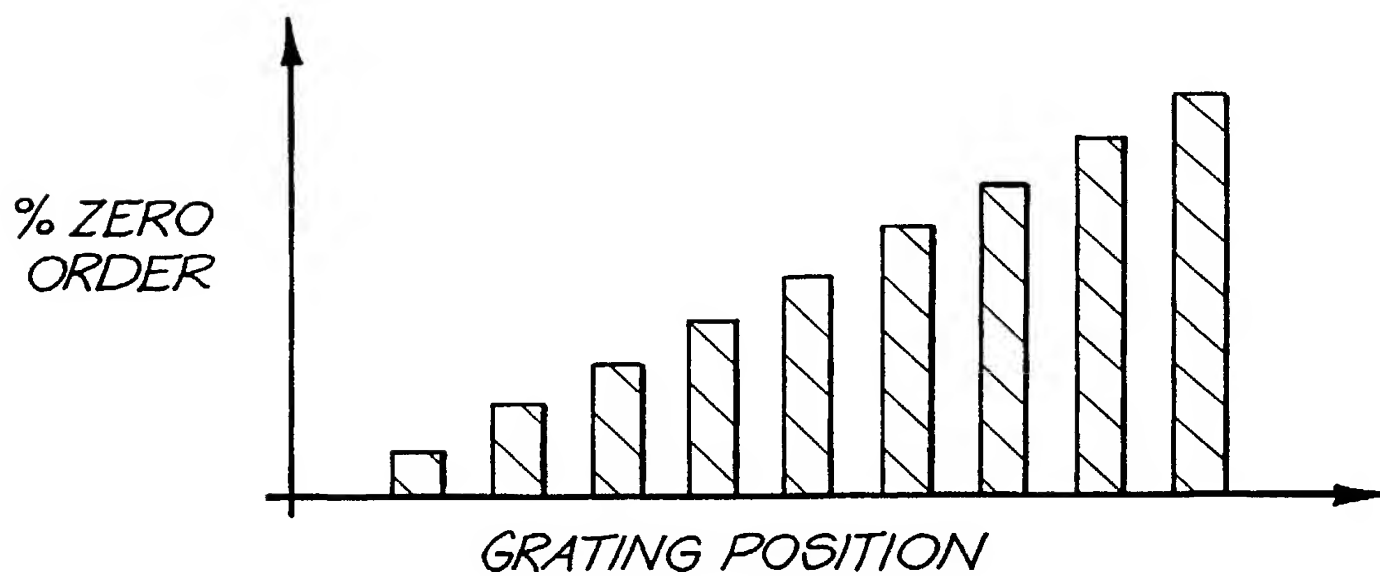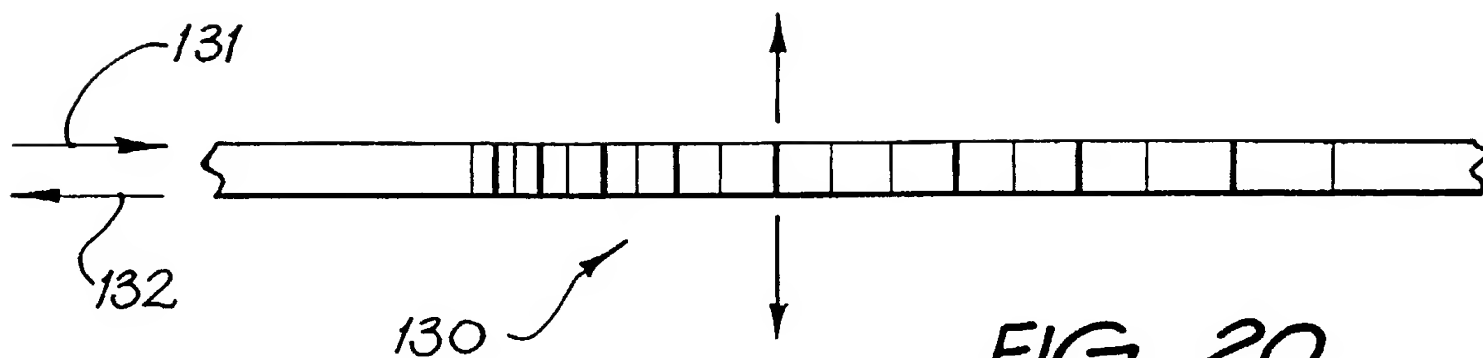

10019746-061902

Customized PTO/SB/01 (10-01)

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION</b>	Docket No.	P0
	1 <sup>st</sup> Inventor	John CANNING
	COMPLETE IF KNOWN	
Declaration Submitted with Initial Filing	Serial No.	10/019,746 ✓
Declaration Submitted after Initial Filing	Filing Date	January 15, 2002

As a below named inventor, I hereby declare that:

My residence, mailing address and citizenship are as stated below next to my name.

I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD OF WRITING GRATING STRUCTURES ✓

the specification of which:

is attached hereto

OR

was filed on as US Application No. or PCT International Application No. ,  
and (if applicable) was amended on .

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT International filing date of the continuation-in-part application.

I hereby claim FOREIGN PRIORITY benefits under 35 USC 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's certificate(s), or 365(a) of any PCT International application which designated at least one country other than the US, listed below and have also identified below by checking the box, any foreign application for patent, inventor's certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed. ( ADDITIONAL APPLICATIONS IDENTIFIED ON ADDITIONAL INFORMATION SHEET)

Prior Foreign Appl. No.	Country	Day/Month/Year Filed	Priority Not Claimed
PQ1655 ✓	Australia ✓	15 July 1999 ✓	

As a named inventor, I hereby appoint the registered practitioners of LARSON &amp; TAYLOR, PLC associated with (Customer Number 000881) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Direct all correspondence to that Customer Number.

Direct all telephone calls to  
at TEL (703) 739-4900 (Fax 703-739-8577) e-mail:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. ( ADDITIONAL INVENTORS IDENTIFIED ON ADDITIONAL INFORMATION SHEET)

<b>SOLE OR FIRST INVENTOR</b>		Citizenship	Australia ✓
Given Name (First and Middle (if any)) John		Family Name or Surname	CANNING
Full Mailing Address 10 Francis Street, Carlton NSW 2218, Australia		AUX	
Residence - City, State/Country (if different from PO address)			
SIGN AND DATE HERE	Inventor's Signature J. Canning	Date	8-5-2002
<b>SECOND JOINT INVENTOR (if any)</b>		Citizenship	
Given Name (First and Middle (if any))		Family Name or Surname	
Full Mailing Address			
Residence - City, State/Country (if different from PO address)			
SIGN AND DATE HERE	Inventor's Signature	Date	
<b>THIRD JOINT INVENTOR (if any)</b>		Citizenship	
Given Name (First and Middle (if any))		Family Name or Surname	
Full Mailing Address			
Residence - City, State/Country (if different from PO address)			
SIGN AND DATE HERE	Inventor's Signature	Date	

LARSON &amp; TAYLOR, PLC • 1199 North Fairfax Street • Suite 900 • Alexandria Virginia 22314

10/01